


# LED Flood Light | 150W

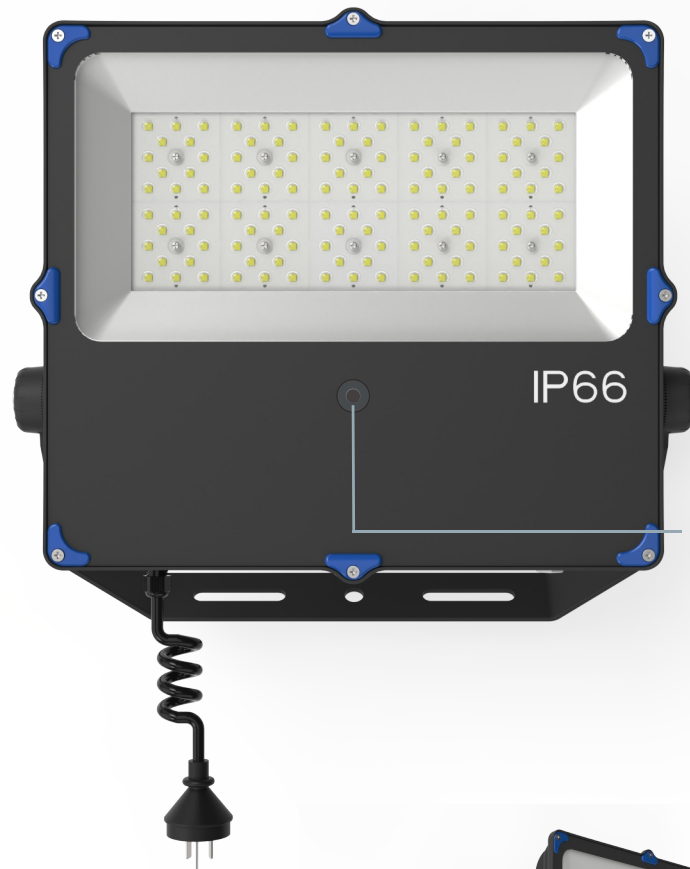

Built-in sensor

## Advantages

- High efficiency, 140lm/w available.
- Beam angle 30° /60° /90° /120° / T2W/ T3M
- Integrated die-casting aluminum housing, elegant appearance
- Good heat dissipation, long lifespan
- Tempered glass, surface coating process, excellent corrosion-proof
- IP66



## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales











**Victorian  
Energy  
Upgrades**



**LM-80 TM21 LM79  
ISTMT LCP**



## DISTANCE

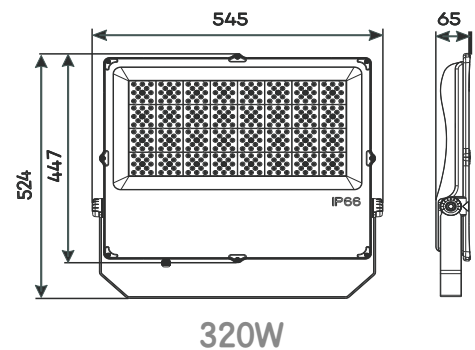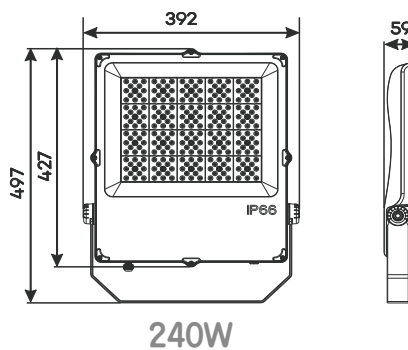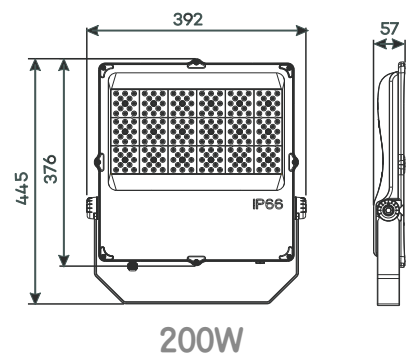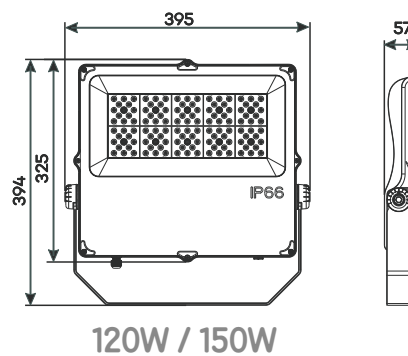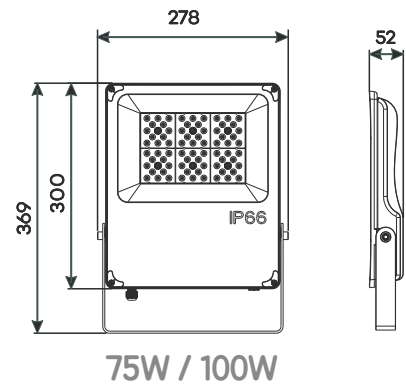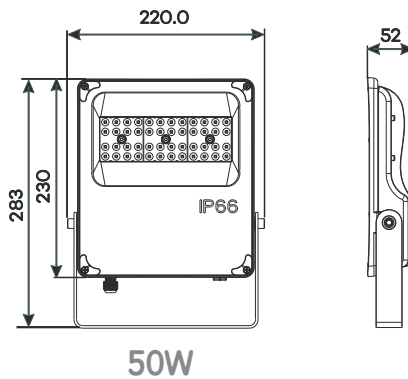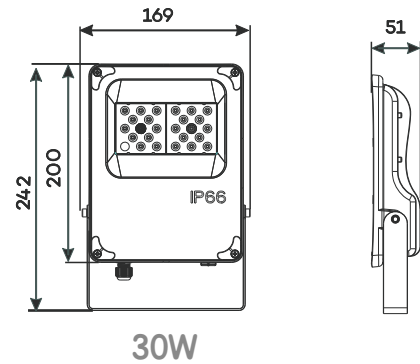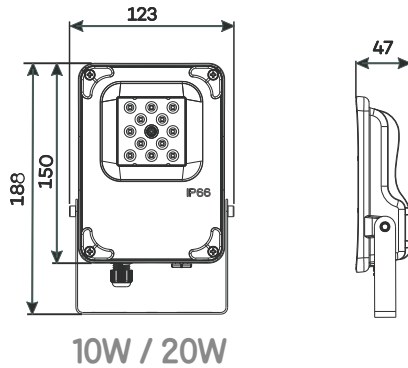

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**Victorian  
Energy  
Upgrades**



**LM-80 TM21 LM79  
ISTMT LCP**

**ESSENTIAL SERVICES COMMISSION**

## APPLICATION

- Billboard
- Road
- Tunnel
- Bridge and culvert
- Square
- Building



## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



IPART  
Independent Pricing and Regulatory Tribunal  
New South Wales



Victorian  
Energy  
Upgrades

5 year warranty

LM-80 TM21 LM79  
ISTMT LCP



## SPECIFICATIONS

Item No.	ERS-F150W
Power	150W
Efficiency	150lm/w
Lumen	22500lm
Input Voltage	AC220-240V,50Hz
CCT	3000K-6500K
IP Rating	IP 66
Beam Angle	30° /60° /90° /120° /T2M/T3M
Power Factor	>0.9
CRI	Ra>80
LED Chips	Lumileds 3030
Driver	ERS driver
Sensor	Daylight & Microwave Motion Sensor
Dimmable	PWM
Total Harmonic Distortion (THD)	≤15%
Power Supply Efficiency	>90%
Product Size (mm)	394X395X57

### Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales






**Victorian  
Energy  
Upgrades**



**LM-80 TM21 LM79  
ISTMT LCP**


**ESSENTIAL SERVICES COMMISSION**

## INSTALLATION

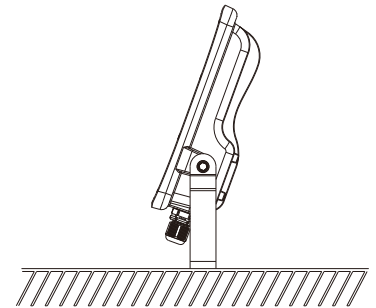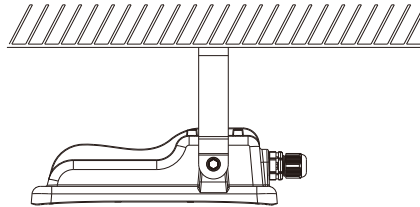

1. Fix the bracket on the wall by screws
2. Adjust the lamp body to proper orientation
3. Fix the screws that connecting the bracket and the lamp body.
4. Connect the wires. Brown wire is L, blue wire is N, and yellow-green wire is G.

## DISTRIBUTION CURVE FLUX

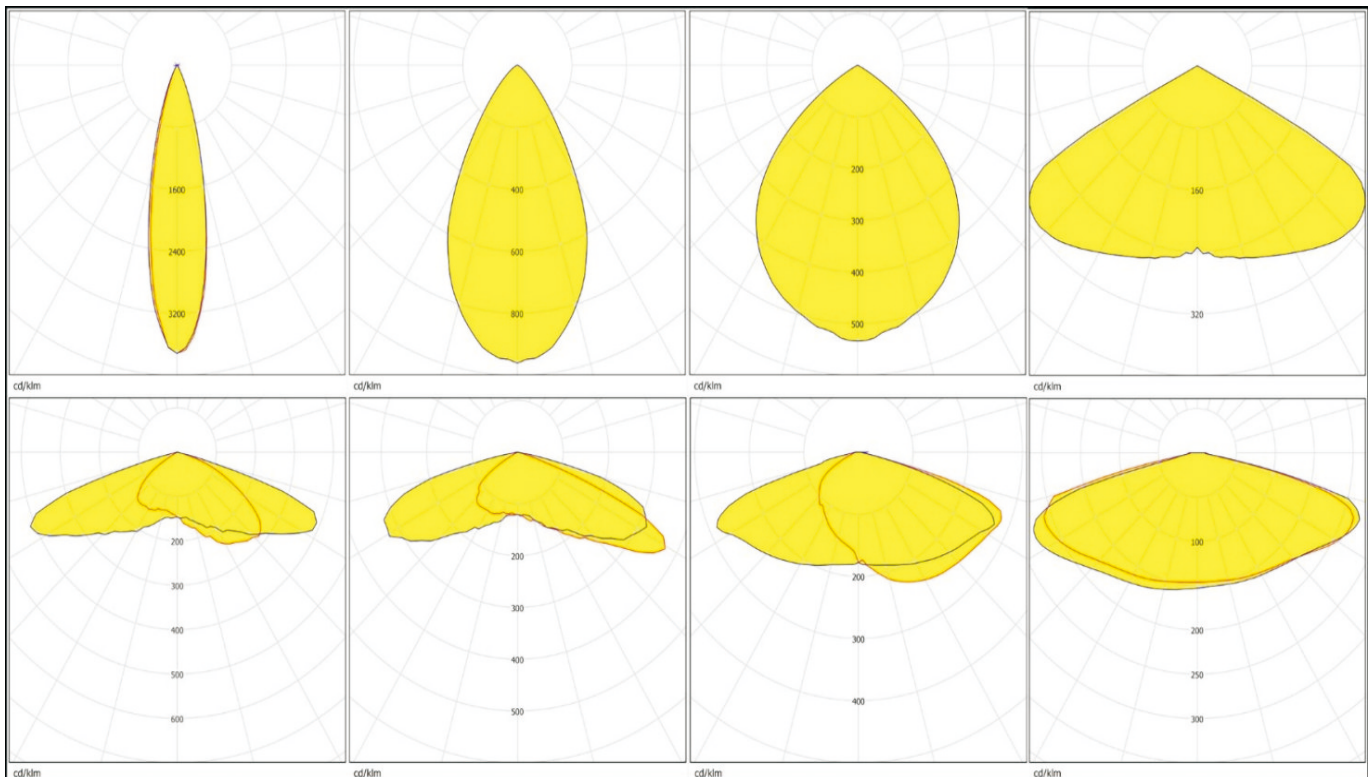

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales





**Victorian Energy Upgrades**




**LM-80 TM21 LM79  
ISTMT LCP**

**ESSENTIAL SERVICES COMMISSION**

## LUMINOUS INTENSITY DISTRIBUTION

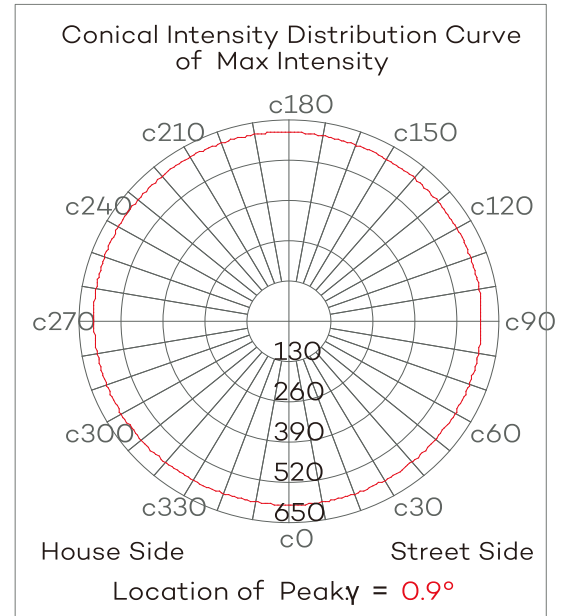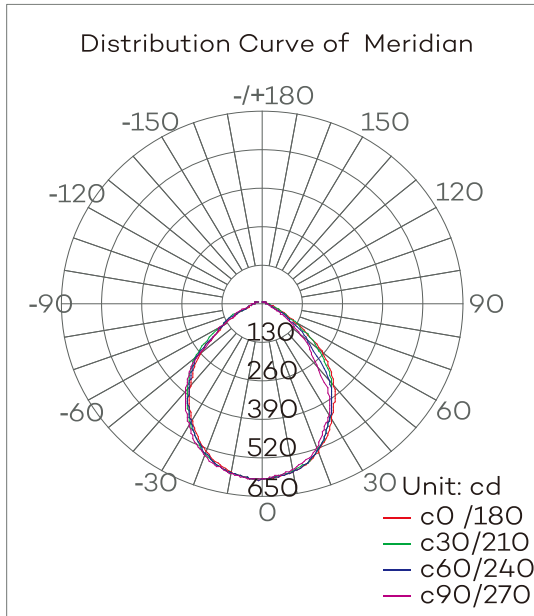

## Illumination Cone Curve

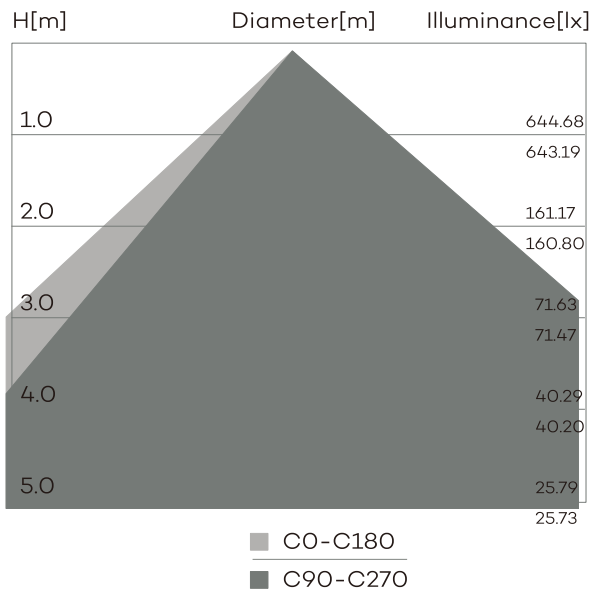

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**Victorian Energy Upgrades**



**LM-80 TM21 LM79**  
**ISTMT LCP**

**ESSENTIAL SERVICES COMMISSION**

## PACKING

Item No.	Carton Size (mm)	Qty/CTN	N.W.(KG)	G.W.(KG)
ERS-F10/20W	306X205X265	10	7	10
ERS-F30W	400X260X280	10	12	14
ERS-F50W	500X330X245	8	14.8	17.7
ERS-F75/100W	415X315X365	6	16	19.6
ERS-F120/150W	492X492X80	1	4.28	5.7
ERS-F200W	530X492X80	1	4.82	6.5
ERS-F240W	585X492X80	1	6.1	8.1
ERS-F320W	614X645X85	1	9	11.5

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010  
Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**Victorian  
Energy  
Upgrades**




**LM-80 TM21 LM79  
ISTMT LCP**

**ESSENTIAL SERVICES COMMISSION**



## REMOTE CONTROLLER

Factory setting: When turn on the Flood light, sensor function is closed;  
if you need to open the sensor, please use our remote controller as below.  
Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds),  
standby brightness 0%.

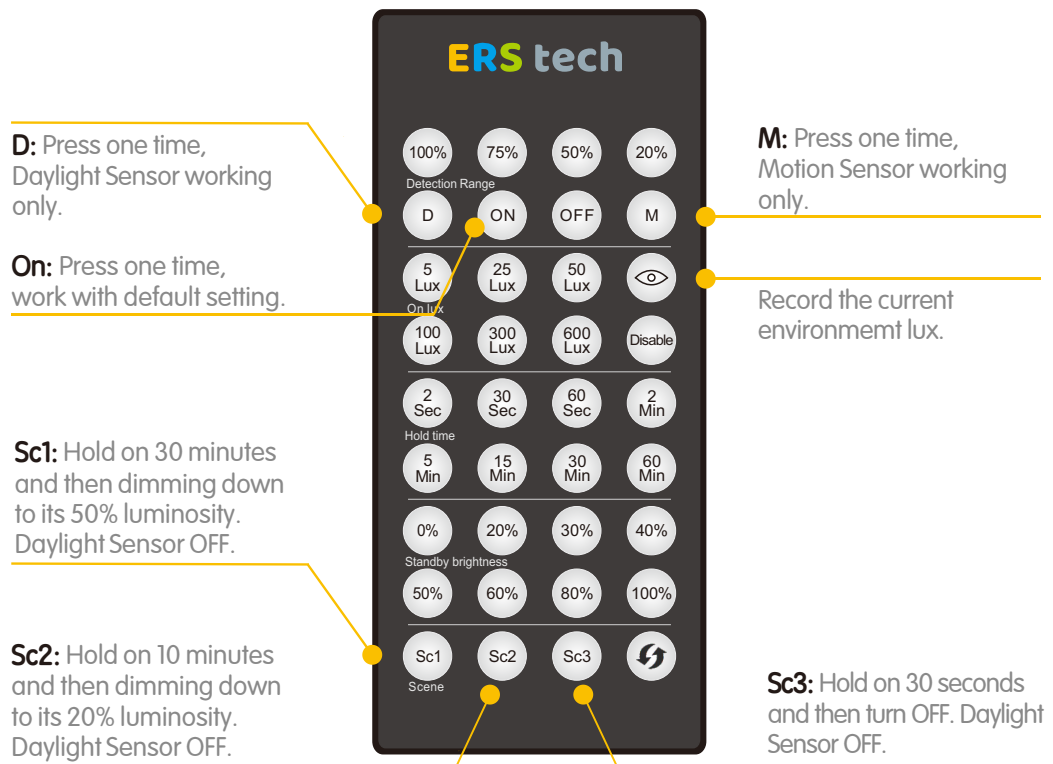

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



IPART  
Independent Pricing and Regulatory Tribunal  
New South Wales



Victorian  
Energy  
Upgrades



LM-80 TM21 LM79  
ISTMT LCP






## FUNCTION DEMO-ON/OFF CONTROL



With insufficient daylight, when motion detected, light remains OFF.





With insufficient daylight, when motion detected, light ON.

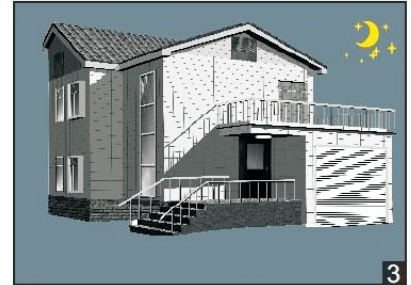

After the last detection and the present hold time elapsed, light OFF.

## SENSOR SPECIFICATION

### Detection Patterns

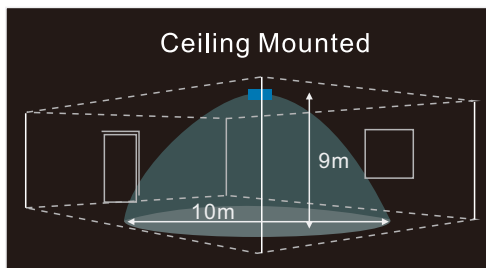

### Technical data

Operating voltage	12VDC $\pm$ 2v
Stand-by power	< 1W
Operating temperature	-20°C ~ +60°C
Detection area	100%/75%/50%/20%
Hold time	2Sec/30Sec/60Sec/2Min/5Min/15Min/30Min/60Min
Daylight threshold	5Lux/25Lux/50Lux/100Lux/300Lux/600Lux/Disable
Microwave power	< 1mW
Microwave frequency	5.8GHz $\pm$ 75MHz
Mounting height	Max. 9m (ceiling mounted)
Detection range	Diameter 10m (ceiling mounted)
Type	Built-in

Note: Sensor setting please refer to remote control

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 49 Metrolink Circuit, Campbellfield VIC 3061

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**Victorian Energy Upgrades**



**LM-80 TM21 LM79**  
**ISTMT LCP**

