
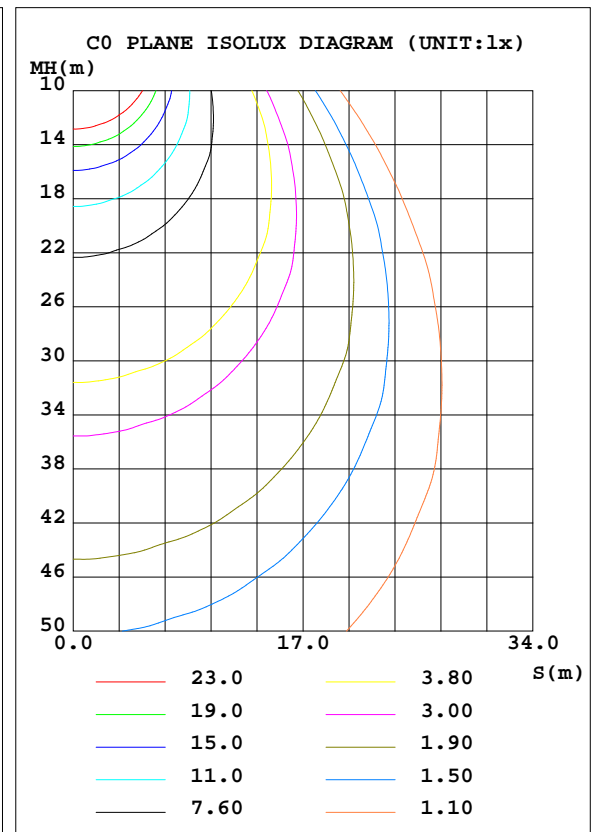


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME: LED CANOPY LIGHT	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.33 lm/W			
MODEL	ERS-C75W-B	Imax(cd)	3794	S/MH(C0/180)	1.22
NOMINAL POWER(W)	75	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	10170	η UP, DN(C0-180)	0.6,48.6
NOMINAL FLUX(lm)	10170.2	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.6,50.2
LAMPS INSIDE	1	η up(%)	1.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	98.8	CIBSE SHR MAX	1.35

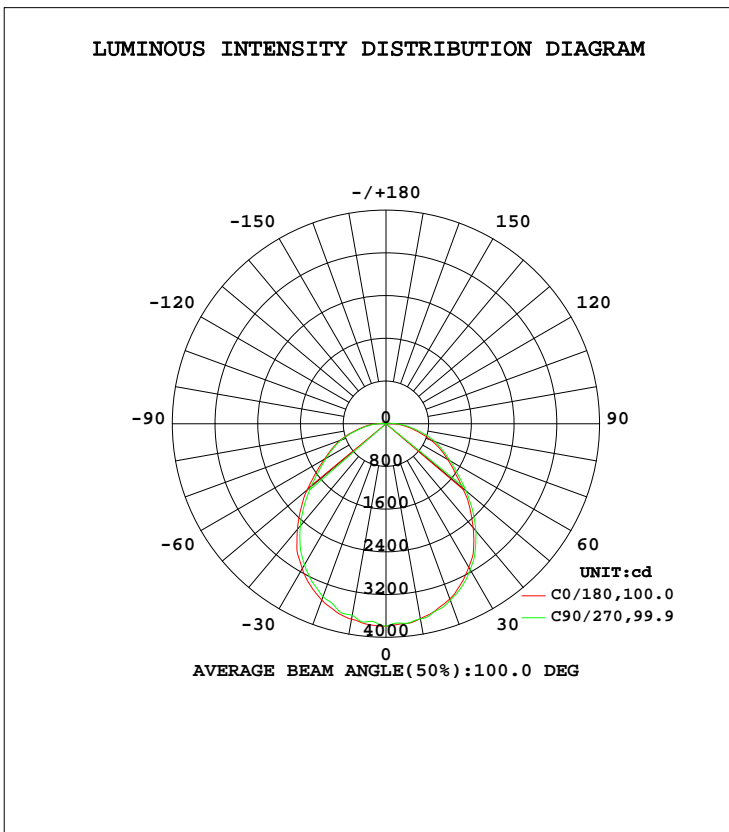

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3718	3699	3645	3707	3706	3714	3711	3710	0- 10	355.4	355.4	3.49,3.49
20	3516	3482	3448	3467	3493	3498	3519	3525	10- 20	1018	1374	13.5,13.5
30	3135	3090	3053	3069	3103	3152	3157	3179	20- 30	1530	2904	28.6,28.6
40	2582	2554	2498	2509	2539	2611	2618	2648	30- 40	1791	4695	46.2,46.2
50	1927	1900	1830	1852	1869	1952	1952	1974	40- 50	1730	6425	63.2,63.2
60	1335	1328	1296	1277	1332	1357	1386	1377	50- 60	1434	7859	77.3,77.3
70	917.6	886.7	893.1	828.6	896.0	879.8	970.7	902.8	60- 70	1104	8962	88.1,88.1
80	487.0	489.4	450.0	454.6	460.4	495.5	522.8	511.0	70- 80	727.9	9690	95.3,95.3
90	186.4	181.0	160.3	161.2	149.9	192.8	193.9	208.7	80- 90	359.8	10050	98.8,98.8
100	70.69	20.33	39.84	15.72	66.75	24.19	52.79	28.42	90-100	91.89	10142	99.7,99.7
110	9.701	1.385	1.329	1.388	11.55	0.9889	0.9113	0.9738	100-110	17.77	10160	99.9,99.9
120	1.757	1.675	1.620	1.708	1.309	1.212	1.171	1.182	110-120	1.479	10161	99.9,99.9
130	2.330	2.430	2.360	2.364	1.619	1.512	1.427	1.483	120-130	1.492	10163	99.9,99.9
140	3.539	3.742	3.743	3.589	1.967	1.857	1.846	1.865	130-140	1.783	10165	99.9,99.9
150	4.925	5.369	5.359	5.173	2.336	2.336	2.290	2.365	140-150	2.059	10167	100,100
160	5.788	5.880	5.942	5.829	3.007	2.886	2.829	2.814	150-160	1.905	10169	100,100
170	5.253	5.145	5.139	5.172	3.577	3.335	3.116	3.139	160-170	1.227	10170	100,100
180	4.358	4.176	3.992	4.330	4.451	4.283	4.035	4.131	170-180	0.4039	10170	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 5586 lm

%lum = 54.9%
%lamp = 54.9%

Conical surface Flux(120deg): 7858.6 lm


%lum = 77.3%
%lamp = 77.3%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2DEG
Operators:East
Test Date:2020-10-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
Humidity:43%
Test Distance:2.492m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

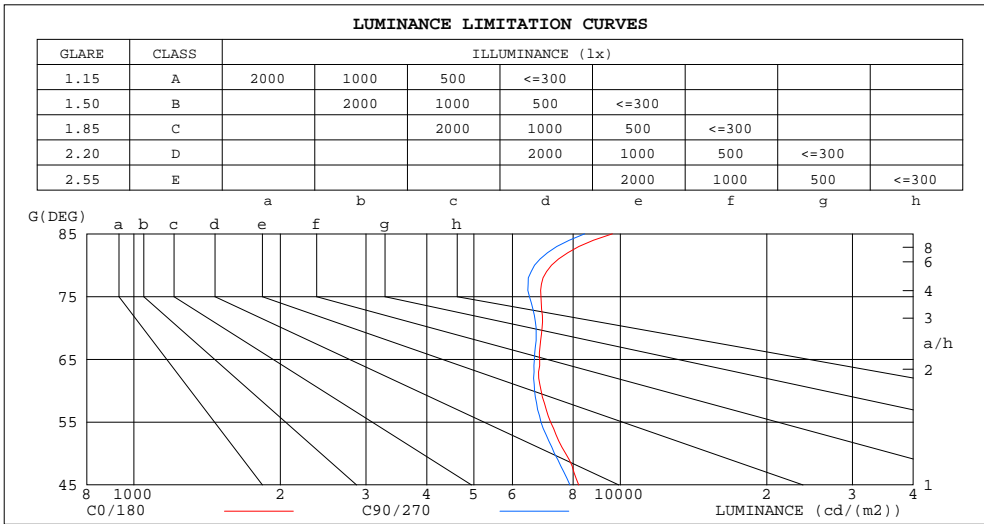

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9627	8445
80	7218	6663
75	6868	6505
70	6905	6715
65	6826	6658
60	6872	6664
55	7189	6867
50	7717	7320
45	8212	7877


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.94	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.62	.55	.69	.61	.54	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.57	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.42	.56	.48	.41	.54	.47	.41	.52	.46	.40	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25

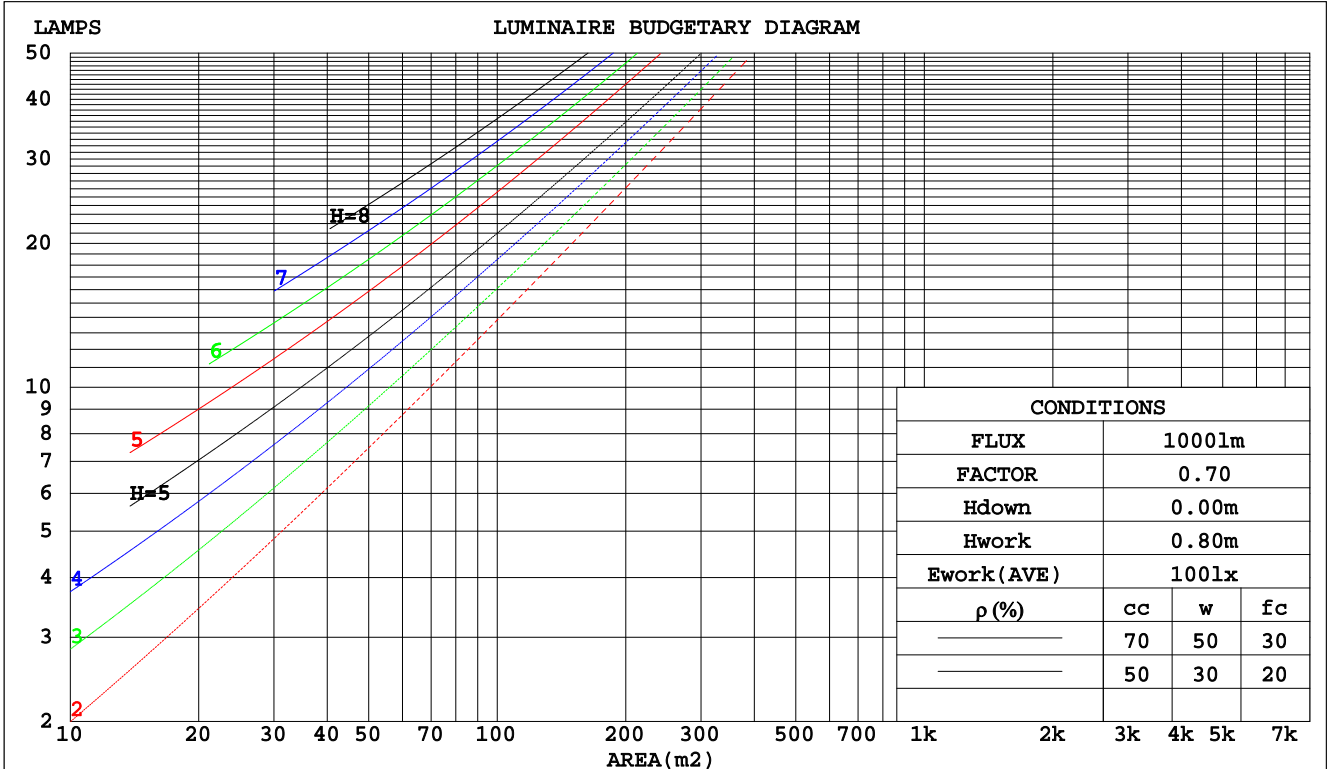

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.321	.183	.058	.314	.179	.057	.300	.172	.055	.287	.166	.053	.275	.160	.051	
2.0	.294	.161	.049	.288	.158	.049	.275	.153	.048	.264	.148	.046	.253	.143	.045	
3.0	.269	.143	.043	.264	.141	.042	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.247	.129	.038	.242	.127	.037	.233	.123	.037	.224	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.224	.115	.033	.215	.112	.033	.207	.109	.032	.199	.107	.032	
6.0	.211	.106	.030	.207	.105	.030	.199	.102	.030	.192	.100	.029	.186	.098	.029	
7.0	.196	.097	.028	.193	.096	.027	.186	.094	.027	.180	.092	.027	.173	.090	.026	
8.0	.184	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.172	.083	.023	.169	.082	.023	.164	.081	.023	.158	.079	.023	.153	.078	.023	
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.190	.165	.143	.163	.142	.123	.111	.097	.085	.064	.056	.049	.021	.018	.016	
2.0	.182	.141	.107	.156	.121	.092	.107	.084	.064	.062	.049	.038	.020	.016	.012	
3.0	.174	.123	.084	.149	.107	.072	.102	.074	.051	.059	.043	.030	.019	.014	.010	
4.0	.166	.110	.068	.142	.095	.059	.098	.066	.041	.057	.039	.025	.018	.013	.008	
5.0	.158	.100	.057	.136	.086	.049	.093	.060	.035	.054	.035	.021	.017	.012	.007	
6.0	.151	.091	.049	.130	.079	.042	.089	.055	.030	.052	.033	.018	.017	.011	.006	
7.0	.144	.084	.043	.124	.073	.037	.085	.051	.026	.050	.030	.016	.016	.010	.005	
8.0	.137	.079	.038	.118	.068	.033	.082	.048	.024	.048	.028	.014	.015	.009	.005	
9.0	.131	.074	.035	.113	.064	.030	.078	.045	.022	.046	.027	.013	.015	.009	.004	
10.0	.126	.069	.032	.108	.060	.028	.075	.042	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm										
NAME:					TYPE:N/A			WEIGHT:N/A		
SPEC.:N/A					DIM.: N/A			SERIAL No.:N/A		
MFR.: ERS					SUR.:N/A			Shielding Angle:N/A		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.4	20.9	19.7	21.1	21.3	19.2	20.7	19.5	20.9	21.1
3H	21.0	22.3	21.3	22.6	22.9	20.8	22.2	21.1	22.5	22.7
4H	21.7	23.0	22.0	23.3	23.6	21.6	22.9	21.9	23.1	23.4
6H	22.4	23.6	22.7	23.9	24.2	22.2	23.4	22.5	23.7	24.0
8H	22.7	23.9	23.0	24.2	24.5	22.4	23.6	22.8	23.9	24.3
12H	23.0	24.1	23.4	24.5	24.8	22.7	23.9	23.1	24.2	24.5
4H 2H	19.9	21.2	20.3	21.5	21.8	19.8	21.1	20.1	21.4	21.7
3H	21.8	22.9	22.1	23.2	23.6	21.7	22.8	22.0	23.1	23.5
4H	22.6	23.7	23.0	24.0	24.4	22.5	23.6	22.9	23.9	24.3
6H	23.5	24.4	23.9	24.8	25.2	23.3	24.3	23.7	24.6	25.0
8H	23.9	24.8	24.3	25.1	25.6	23.7	24.6	24.1	25.0	25.4
12H	24.3	25.1	24.7	25.5	25.9	24.1	24.9	24.5	25.3	25.7
8H 4H	23.0	23.9	23.4	24.3	24.7	22.9	23.8	23.3	24.2	24.6
6H	24.0	24.8	24.5	25.2	25.6	23.9	24.6	24.4	25.1	25.5
8H	24.6	25.2	25.1	25.7	26.2	24.4	25.1	24.9	25.5	26.0
12H	25.2	25.7	25.7	26.2	26.7	25.0	25.5	25.5	26.0	26.5
12H 4H	23.0	23.8	23.5	24.2	24.7	22.9	23.8	23.4	24.2	24.6
6H	24.2	24.8	24.6	25.3	25.7	24.0	24.7	24.5	25.1	25.6
8H	24.8	25.3	25.3	25.8	26.3	24.6	25.2	25.1	25.7	26.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				

CIE Pub.117 Corrected 10170 lm Total Lamp Luminous Flux. (8log(F/F0) = 8.1)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	68	57	50	67	56	49	65	56	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	101	94	89	99	93	88	95	90	85	77
4.00	105	99	95	103	98	93	99	94	90	81
5.00	108	103	98	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

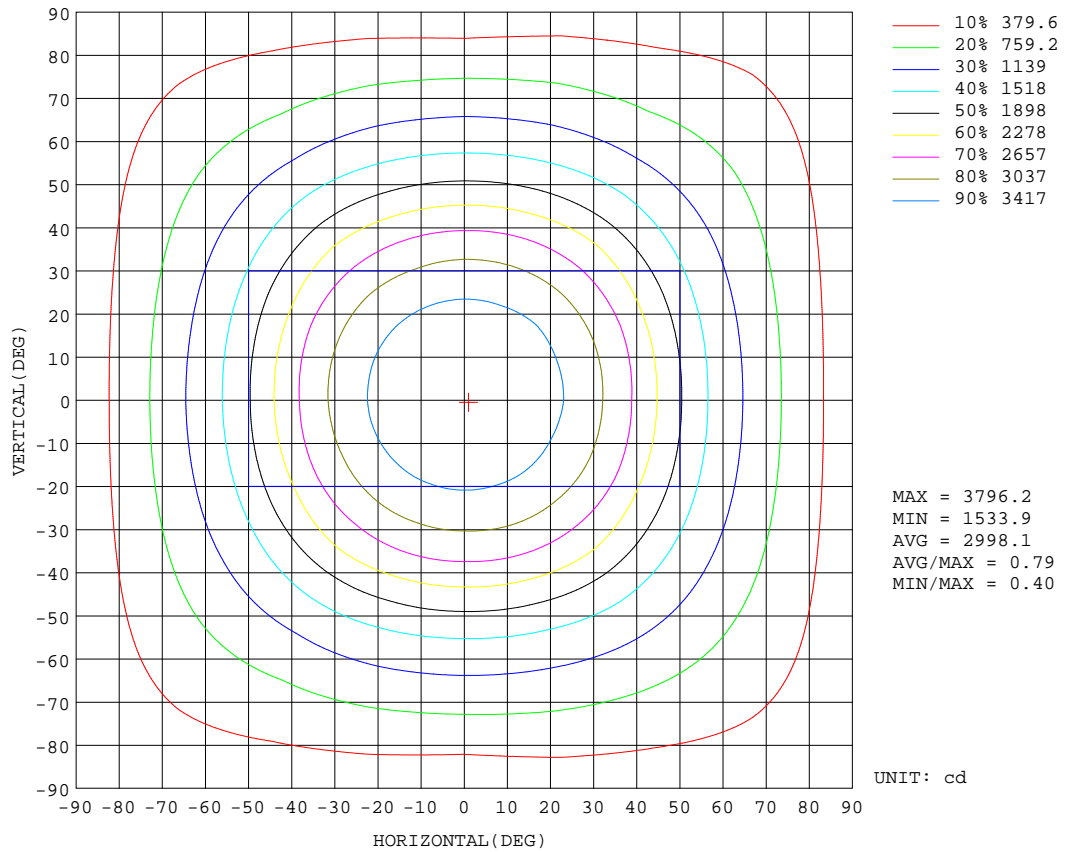


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

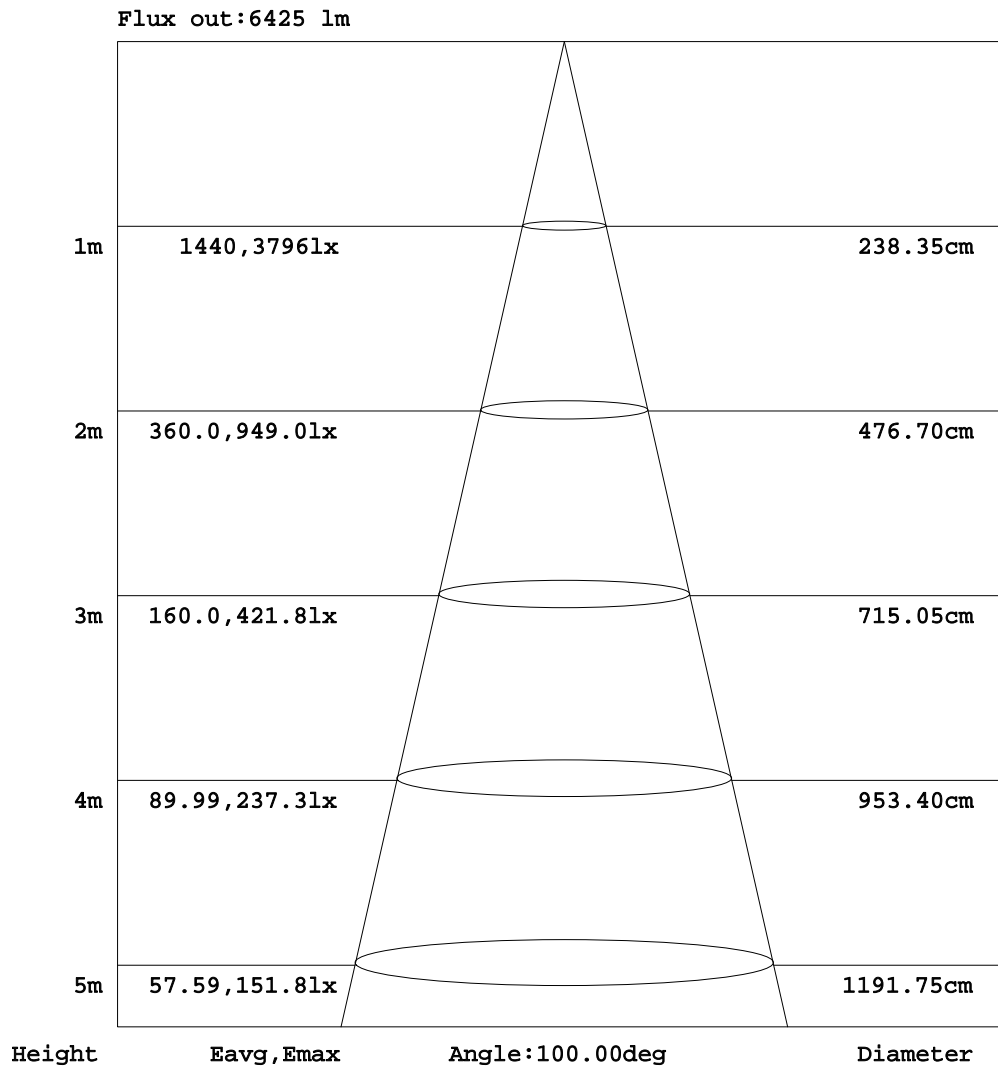


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

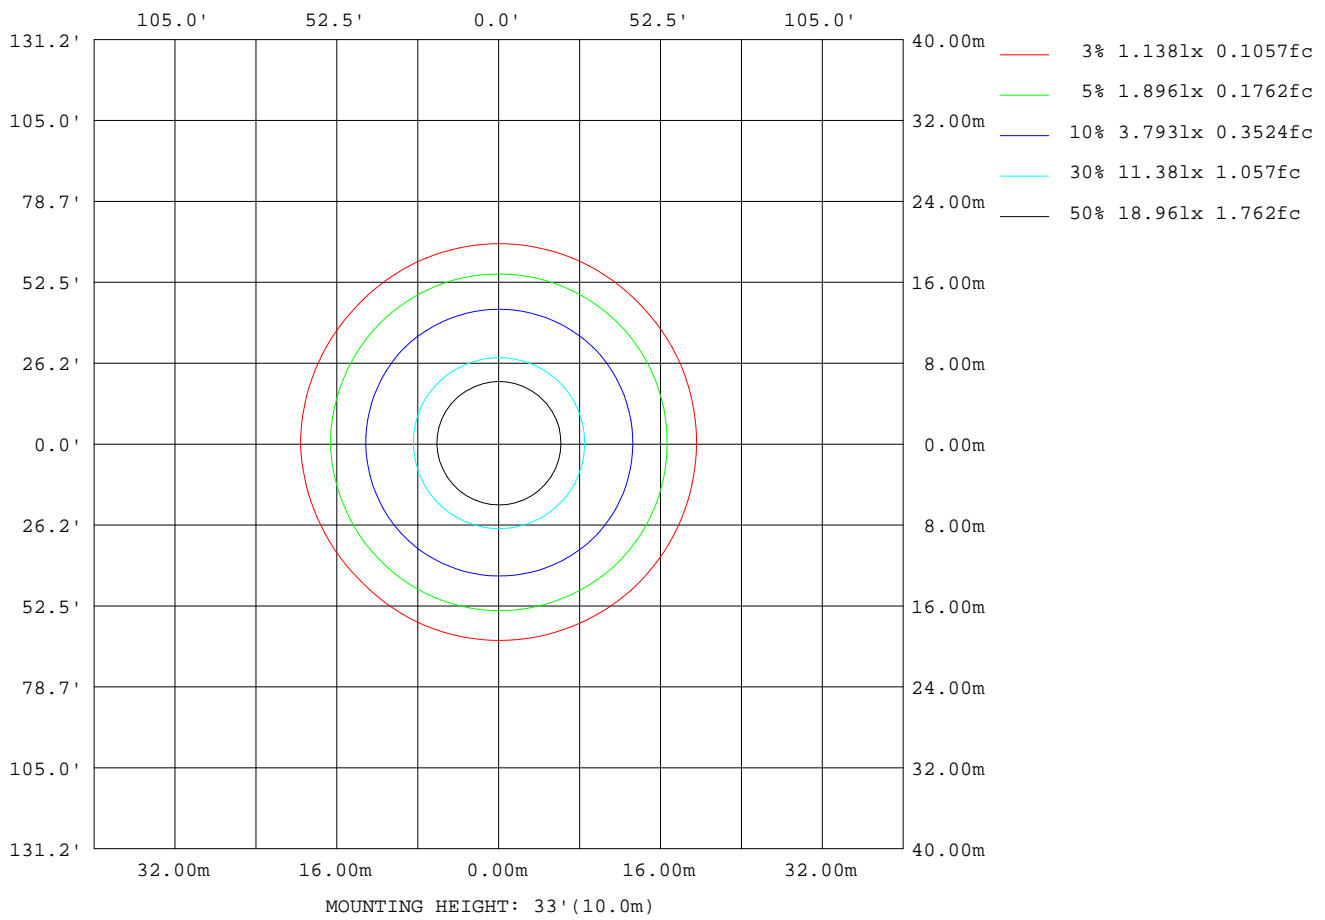

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A


AvgL	cd/m2
L_0~180(65)av	6818
L_0~180(75)av	6715
L_0~180(85)av	9101
L_90~270(65)av	6887
L_90~270(75)av	6941
L_90~270(85)av	9285
L_45(65)av	6662
L_45(75)av	6623
L_45(85)av	9601

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks:

Planar Illuminance Curve

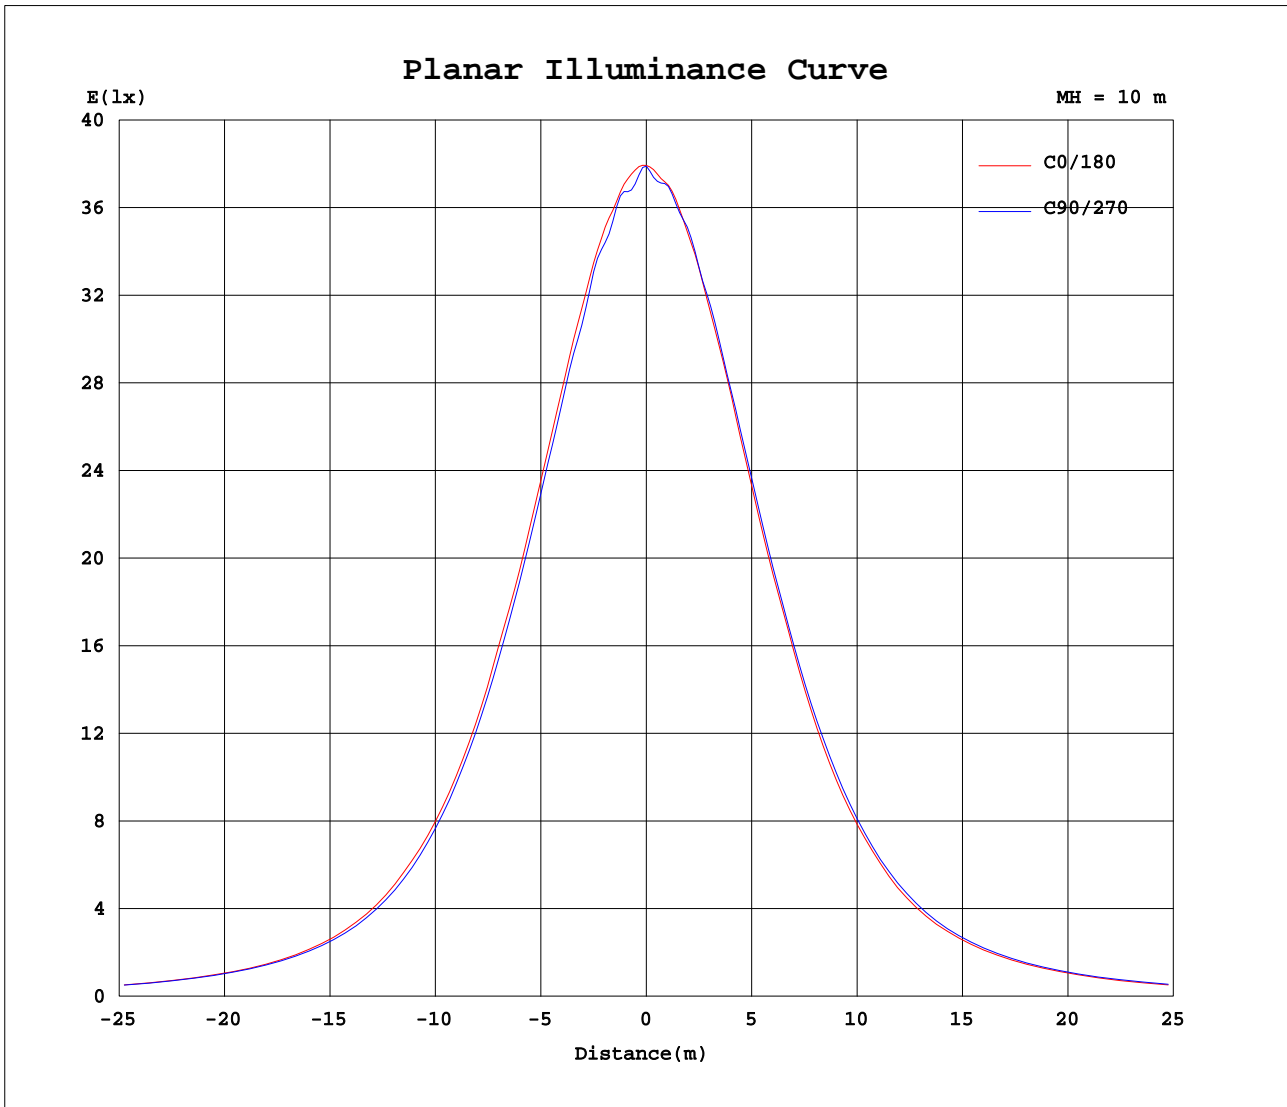

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2DEG
 Operators: East
 Test Date: 2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity: 43%
 Test Distance: 2.492m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.0V I:0.3328A P:74.60W PF:0.9745 Lamp Flux:10170.2x1 lm		
NAME:	TYPE:N/A	WEIGHT:N/A
SPEC.:N/A	DIM.: N/A	SERIAL No.:N/A
MFR.: ERS	SUR.:N/A	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG)\ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790	3790			
5	3772	3737	3708	3719	3716	3698	3692	3740	3758	3718	3713	3736	3753	3754	3735	3737			
10	3718	3646	3699	3657	3645	3645	3707	3655	3706	3680	3714	3688	3711	3705	3710	3676			
15	3639	3621	3573	3608	3579	3610	3557	3591	3614	3621	3631	3627	3624	3633	3640	3637			
20	3516	3484	3482	3445	3448	3442	3467	3476	3493	3485	3498	3528	3519	3520	3525	3518			
25	3345	3310	3299	3270	3269	3261	3278	3293	3316	3339	3356	3358	3363	3370	3382	3365			
30	3135	3124	3090	3074	3053	3051	3069	3081	3103	3132	3152	3145	3157	3172	3179	3174			
35	2906	2873	2845	2821	2802	2799	2806	2844	2862	2894	2899	2906	2913	2932	2935	2930			
40	2582	2573	2554	2524	2498	2496	2509	2518	2539	2589	2611	2610	2618	2634	2648	2631			
45	2256	2233	2250	2190	2166	2160	2203	2184	2218	2246	2306	2285	2293	2305	2343	2291			
50	1927	1916	1900	1854	1830	1830	1852	1864	1869	1923	1952	1947	1952	1963	1974	1964			
55	1602	1603	1592	1552	1532	1532	1543	1545	1571	1596	1631	1634	1637	1645	1653	1628			
60	1335	1335	1328	1304	1296	1286	1277	1292	1332	1337	1357	1378	1386	1385	1377	1362			
65	1121	1106	1103	1099	1094	1080	1045	1080	1120	1115	1104	1153	1169	1162	1126	1133			
70	918	898	887	904	893	873	829	869	896	900	880	945	971	957	903	927			
75	691	683	676	686	655	656	629	659	661	679	670	726	742	746	690	714			
80	487	496	489	489	450	468	455	473	460	492	496	528	523	549	511	519			
85	326	335	322	326	286	304	293	305	291	324	335	357	343	376	352	360			
90	186	187	181	179	160	166	161	155	150	172	193	197	194	208	209	209			
95	85.6	9.85	65.4	89.6	93.5	81.2	54.6	18.4	1.99	8.63	67.9	103	112	105	72.1	0.17			
100	70.7	50.6	20.3	32.0	39.8	27.7	15.7	47.8	66.8	50.0	24.2	41.2	52.8	40.1	28.4	56.4			
105	34.3	21.7	1.35	4.29	7.07	1.30	1.42	22.5	36.8	25.2	2.13	4.86	14.1	3.39	5.27	25.9			
110	9.70	1.60	1.38	1.37	1.33	1.34	1.39	4.24	11.5	2.74	0.99	0.93	0.91	0.92	0.97	4.42			
115	1.61	1.56	1.50	1.48	1.44	1.46	1.50	1.56	1.17	1.16	1.11	1.06	1.03	1.06	1.08	1.14			
120	1.76	1.71	1.67	1.69	1.62	1.65	1.71	1.70	1.31	1.23	1.21	1.27	1.17	1.18	1.18	1.20			
125	1.96	1.93	1.97	1.99	1.92	1.95	1.96	1.96	1.47	1.34	1.36	1.32	1.30	1.32	1.32	1.30			
130	2.33	2.37	2.43	2.45	2.36	2.37	2.36	2.36	1.62	1.53	1.51	1.48	1.43	1.52	1.48	1.47			
135	2.83	2.91	2.96	2.98	2.92	2.94	2.86	2.81	1.78	1.71	1.67	1.68	1.64	1.70	1.70	1.67			
140	3.54	3.64	3.74	3.70	3.74	3.71	3.59	3.46	1.97	1.83	1.86	1.87	1.85	1.86	1.87	1.88			
145	4.36	4.47	4.69	4.67	4.69	4.64	4.50	4.25	2.15	1.99	2.12	2.14	2.13	2.11	2.12	2.15			
150	4.93	5.14	5.37	5.41	5.36	5.34	5.17	4.91	2.34	2.20	2.34	2.30	2.29	2.31	2.37	2.38			
155	5.52	5.76	5.79	5.86	5.87	5.83	5.66	5.54	2.60	2.48	2.61	2.62	2.58	2.64	2.64	2.73			
160	5.79	5.86	5.88	6.04	5.94	6.00	5.83	5.60	3.01	2.93	2.89	2.80	2.83	2.82	2.81	3.05			
165	5.48	5.58	5.62	5.60	5.62	5.64	5.61	5.39	3.28	3.23	3.11	2.99	2.88	2.91	2.94	3.28			
170	5.25	5.20	5.15	5.03	5.14	5.11	5.17	5.13	3.58	3.57	3.33	3.24	3.12	3.12	3.14	3.47			
175	4.95	4.89	4.78	4.67	4.52	4.71	4.78	4.94	4.01	4.01	3.84	3.67	3.57	3.50	3.63	3.88			
180	4.36	4.14	4.18	3.97	3.99	4.07	4.33	4.31	4.45	4.46	4.28	4.27	4.03	4.08	4.13	4.39			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2DEG
 Operators:East
 Test Date:2020-10-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.351
 Humidity:43%
 Test Distance:2.492m [K=1.0000]
 Remarks: