


# LED Solar Street Light-F | 30W



## Features

1. High class integrated aluminum alloy case
2. Lighting mode with motion sensor
3. 360° view angle
4. Over 3 nights lighting after full charge
5. Easy to install, auto on/off
6. With remote control, UVA technology, bring high corrosion resistance, 30m control operation, increase/decrease the brightness



- RESUME** Resume default setting
- DEMO** Full lighting 1 min, then off
- BRIGHT-** Increase brightness 5% every time
- BRIGHT+** Decrease brightness 5% every time
- ON** Turn on
- OFF** Turn off

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010  
Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**Victorian Energy Upgrades**




**LM-80 TM 21 LM 79**  
**ISTMT LCP**




## APPLICATION

Highway / Patio Lighting / Building Parking / Bike Path / Courtyard / Garden / Park /  
Street / Roadway / Pathway / Parking Lot / Private Road / Sidewalk / Public Square / Plaza .

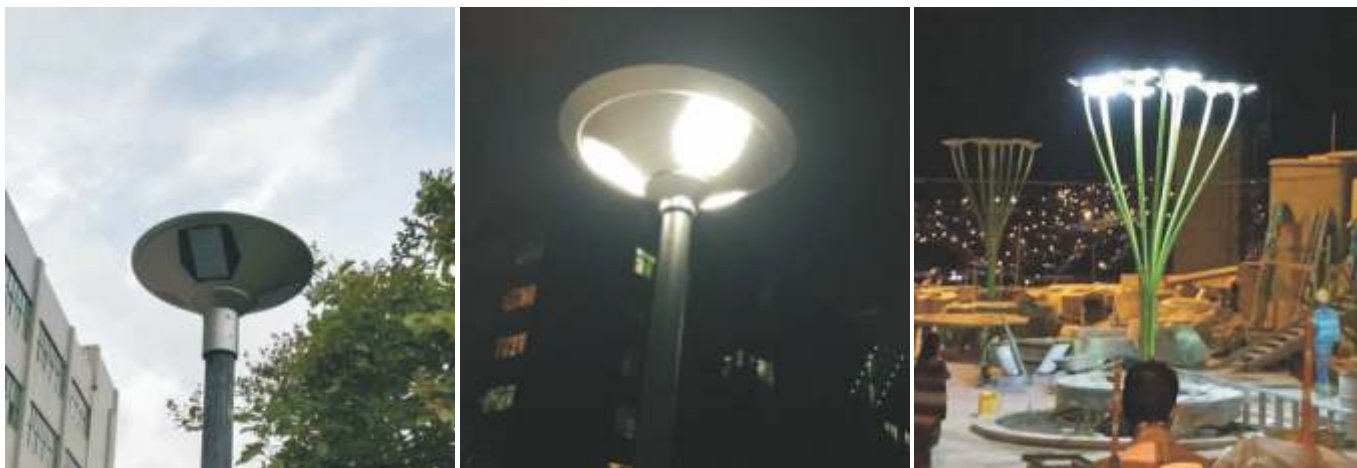

## DIMENSION (Unit:mm)

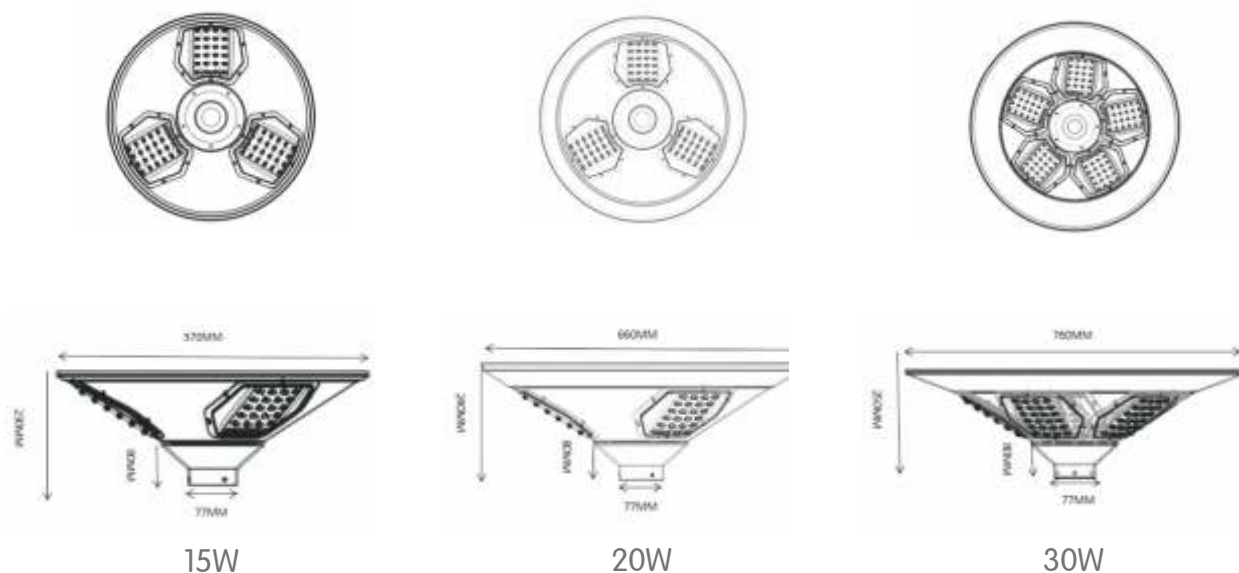

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second  
Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: [info@erstech.com.au](mailto:info@erstech.com.au)



IPART  
Independent Pricing and Regulatory Tribunal  
New South Wales



Victorian  
Energy  
Upgrades




LM-80 TM 21 LM 79  
ISTMT LCP



## SPECIFICATIONS

Item No.	ERS-SSF-30W
Lumen	2200lm
Solar Panel	18V 40W
Mounting Height	3~5m
Battery	320WH 12V
Dimension (mm)	Φ 660X240
Battery Type	Li-ion
Cloudy/Rainy Days	3-7 Cloudy / Rainy days
Solar Charging Time	9-10 hours by bright sunlight
Motion Sensor	Yes (Microwave Sensor)
Certificates	CE、ROSH
IP Rating	IP 65
Working Temperature	-25℃ to 65℃
Install Pole Diameter	Φ 70- Φ 75mm
Lighting Mode	Microwave Sensor
Material	Aluminium alloy

## PHOTOMETRIC DIAGRAMS:

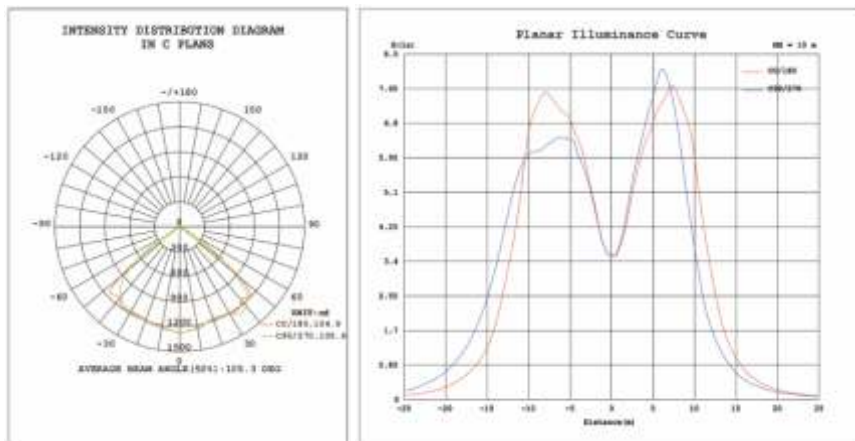

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010  
Email: info@erstech.com.au



IPART  
Independent Pricing and Regulatory Tribunal  
New South Wales



Victorian  
Energy  
Upgrades



LM-80 TM 21 LM 79  
ISTMT LCP



## PACKING INFORMATION



Item No.	PCS /CTN	OUTER CARTON SIZE (M)			CTN CBM	N.W/CTN	G.W/CTN
		L	W	H			
ERS-SSF-20W	1	0.63	0.62	0.27	0.11	6.0	7.6
ERS-SSF-30W	1	0.71	0.71	0.30	0.15	8.5	10.0
ERS-SSF-50W	1	0.81	0.71	0.30	0.20	11.0	12.8

## INSTALLTION DIAGRAM



## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010  
Email: info@erstech.com.au



Victorian  
Energy  
Upgrades



LM-80 TM 21 LM 79  
ISTMT LCP

