


LED Solar Street Light-F | 50W



Features

1. High class integrated aluminum alloy case
2. Lighting mode with motion sensor
3. 360° view angle
4. Over 3 nights lighting after full charge
5. Easy to install, auto on/off
6. With remote control, UVA technology, bring high corrosion resistance, 30m control operation, increase/decrease the brightness



- | | |
|----------------|-----------------------------------|
| RESUME | Resume default setting |
| DEMO | Full lighting 1 min, then off |
| BRIGHT- | Increase brightness 5% every time |
| BRIGHT+ | Decrease brightness 5% every time |
| ON | Turn on |
| OFF | Turn off |

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian Energy Upgrades




LM-80 TM 21 LM 79
ISTMT LCP




APPLICATION

Highway / Patio Lighting / Building Parking / Bike Path / Courtyard / Garden / Park /
Street / Roadway / Pathway / Parking Lot / Private Road / Sidewalk / Public Square / Plaza .

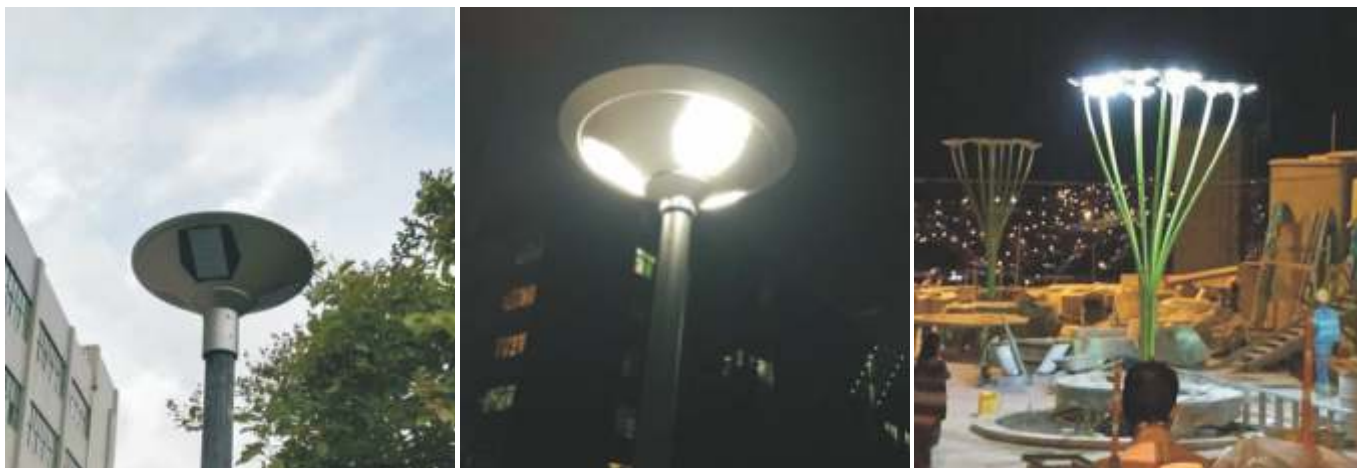

DIMENSION (Unit:mm)

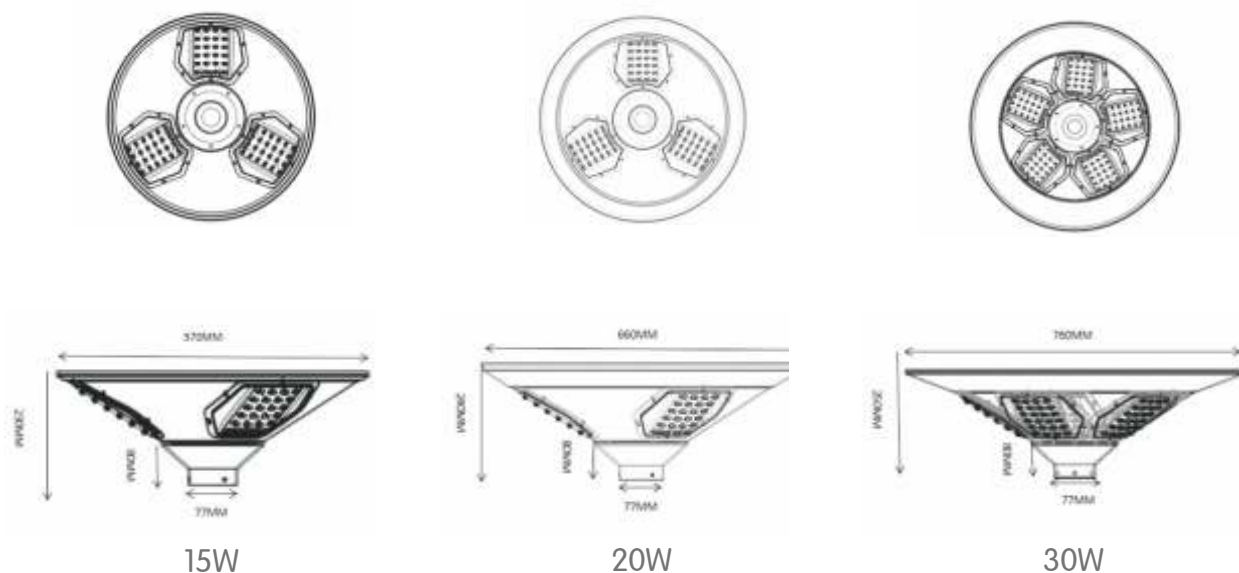

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second
Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



**Victorian
Energy
Upgrades**




LM-80 TM 21 LM 79
ISTMT LCP



SPECIFICATIONS

Item No.	ERS-SSF-50W
Lumen	3300lm
Solar Panel	18V 50W
Mounting Height	4~6m
Battery	420WH 12V
Dimension (mm)	Φ760X250
Battery Type	Li-ion
Cloudy/Rainy Days	3-7 Cloudy / Rainy days
Solar Charging Time	9-10 hours by bright sunlight
Motion Sensor	Yes (Microwave Sensor)
Certificates	CE、ROSH
IP Rating	IP 65
Working Temperature	-25℃ to 65℃
Install Pole Diameter	Φ70- Φ75mm
Lighting Mode	Microwave Sensor
Material	Aluminium alloy

PHOTOMETRIC DIAGRAMS:

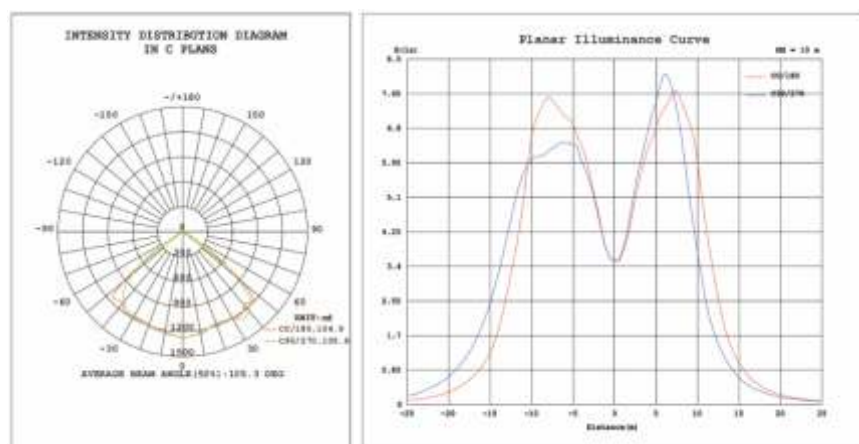

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian
Energy
Upgrades



LM-80 TM 21 LM 79
ISTMT LCP



PACKING INFORMATION



Item No.	PCS /CTN	OUTER CARTON SIZE (M)			CTN CBM	N.W/CTN	G.W/CTN
		L	W	H			
ERS-SSF-20W	1	0.63	0.62	0.27	0.11	6.0	7.6
ERS-SSF-30W	1	0.71	0.71	0.30	0.15	8.5	10.0
ERS-SSF-50W	1	0.81	0.71	0.30	0.20	11.0	12.8

INSTALLTION DIAGRAM



Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



Victorian
Energy
Upgrades



LM-80 TM 21 LM 79
ISTMT LCP

