


LED Tri-proof Batten Light | 48W



Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China

Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



Victorian Energy Upgrades



LM-80 TM 21 LM 79
ISTMT LCP



APPLICATION

Indoor and outdoor lighting,with IP65,it can be used at chick en farm,basement,car pariking, warehouses,corridors,outside of building,etc



SPECIFICATIONS

| | |
|------------------------|--|
| Item No. | ERS-TRI48W |
| Product Size (mm) | 1507X91X78 |
| Power | 48W |
| LCP | 47.8W |
| Input Voltage | AC220-240V,50Hz |
| Opal Diffuser Material | PC |
| Body Mateial | PC |
| Body Colour | Grey |
| Clips | stainless steel clips |
| Driver Brand | PHILIPS Element non-isolated driver 3 years warranty |
| Efficiency | 150lm/w |
| LED Type | SMD 2835 |
| CCT | 3000K,4000K,5000K,6500K |
| CRI | Ra > 80 |
| Power Factor | > 0.9 |
| Beam Angle | 120° |
| IP Rating | IP65 |
| Warranty | 3 years |
| VEET | Approved |
| IPART | Approved |

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian
Energy
Upgrades



LM-80 TM 21 LM 79
ISTMT LCP




LED MANUAL INSTRUCTION




Safety Notice:

- ① Installation should be done by registered electricians.
- ② Before replacing the driver, please switch off the power supply and wait until it cools down completely.
- ③ Never touch the working luminaire
- ④ In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
- ⑤ Repairment should only be done by registered electricians or official service agent.


Include



Not Include

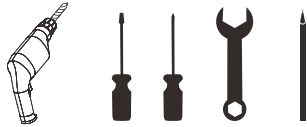

| Model | Power | Fixing Hole Centre |
|------------|-------|--------------------|
| ERS-TRI12W | 12W | 280mm |
| ERS-TRI24W | 24W | 770mm |
| ERS-TRI36W | 36W | 770mm |

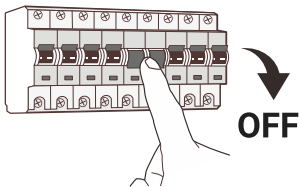


WARNING


Switch off the power supply before installation




1. Drill a $\varnothing 6\text{mm}$ hole




3. Fix the luminaire with the brackets

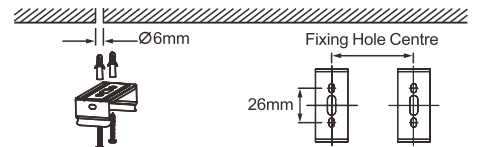


2. According to the Fixing hole centre, install expansion bolts and screws, install the bracket.




4. Finish installation

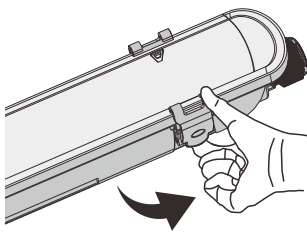


1. Unbuckle the clips

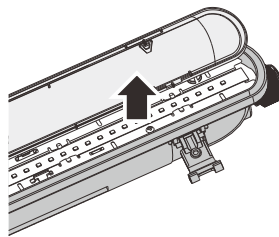


2. Take out of the diffuser

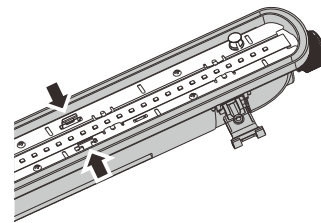


3. Push down the U brackets



4. Take out of the LED module

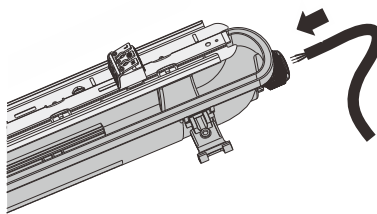

5. Insert the cable through the cable gland

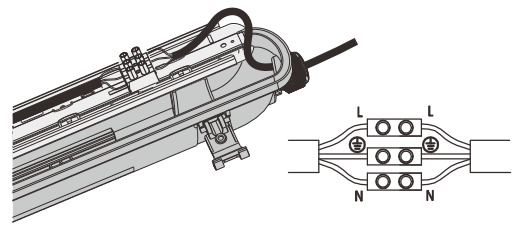

6. Connect the wires, L to L, N to N, \ominus to \ominus

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales




Victorian Energy Upgrades




LM-80 TM 21 LM 79
ISTMT LCP




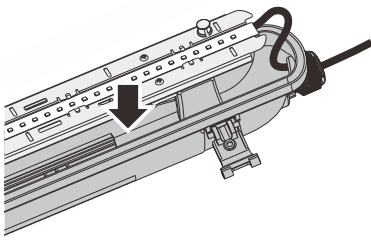

7. Put back the LED module

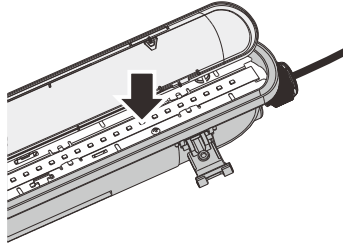

8. Close the luminaire

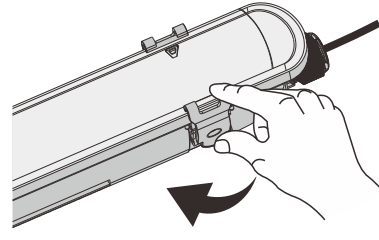


9. Buckle the clips



WARNING

Switch off the power supply before installation

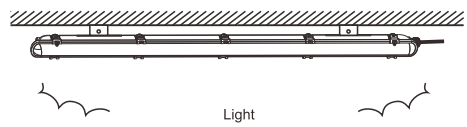

Light

PACKING

| N.W.(KG) | G.W.(KG) | CARTON SIZE(mm) | QTN/CTN |
|----------|----------|-----------------|---------|
| 15 | 18 | 1525X290X260 | 9 |

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian Energy Upgrades



LM-80 TM 21 LM 79
ISTMT LCP

