

LED Emergency Tri-proof Batten Light | 48W



Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian Energy Upgrades



LM-80 TM 21 LM 79
ISTMT LCP



APPLICATION

Indoor and outdoor lighting, with IP65, it can be used at chicken farm, basement, car parking, warehouses, corridors, outside of building, etc



SPECIFICATIONS

Item No.	ERS-TRI48WE
Product Size (mm)	1507X91X78
Power	48W
LCP	47.9W
Emergency Power And Time	4W 120min
Input Voltage	AC220-240V, 50Hz
Opal Diffuser Material	PC
Body Material	PC
Body Colour	Grey
Clips	stainless steel clips
Driver Brand	PHILIPS Element non-isolated driver 3 years warranty
Efficiency	150lm/w
LED Type	SMD 2835
CCT	3000K, 4000K, 5000K, 6500K
CRI	Ra > 80
Power Factor	> 0.9
Beam Angle	120°
IP Rating	IP65
Warranty	3 years
VEET	Approved
IPART	Approved

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
 Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
 Independent Pricing and Regulatory Tribunal
 New South Wales



LM-80 TM 21 LM 79
 ISTMT LCP



Victorian
 Energy
 Upgrades



ESSENTIAL SERVICES COMMISSION


LED MANUAL INSTRUCTION



Safety Notice:

- ❶ Installation should be done by registered electricians.
- ❷ Before replacing the driver, please switch off the power supply and wait until it cools down completely.
- ❸ Never touch the working luminaire
- ❹ In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
- ❺ Repairment should only be done by registered electricians or official service agent.


Include



Not Include



Model	Power	Fixing Hole Centre
ERS-TRI12WE	12W	280mm
ERS-TRI24WE	24W	770mm
ERS-TRI36WE	36W	770mm




WARNING


Switch off the power supply before installation




1. Drill a $\varnothing 6\text{mm}$ hole




3. Fix the luminaire with the brackets

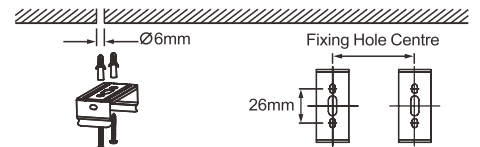


2. According to the Fixing hole centre, instal expansion bolts and screws, instal the bracket.




4. Finish installation




1. Unbuckle the clips




2. Take out of the diffuser




3. Push down the U brackets



4. Take out of the LED module

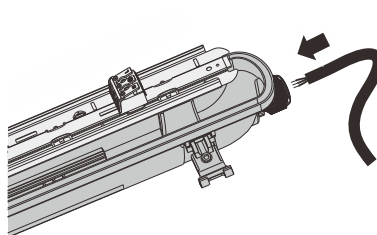

5. Insert the cable through the cable gland

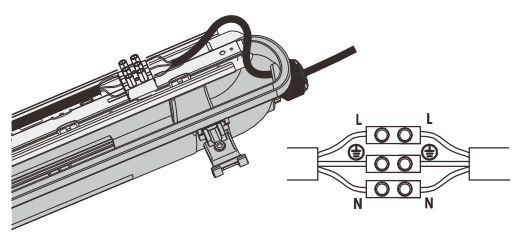

6. Connect the wires, L to L , N to N, \oplus to \oplus

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales




Victorian Energy Upgrades




LM-80 TM 21 LM 79
ISTMT LCP




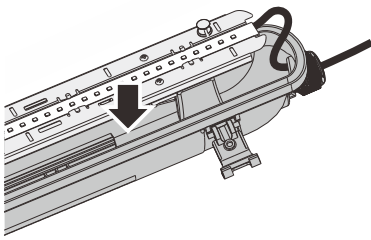

7. Put back the LED module



8. Close the luminaire

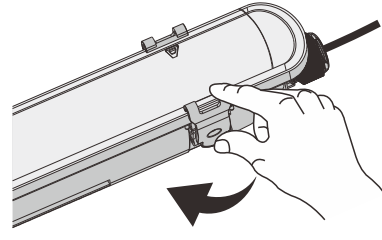


9. Buckle the clips



WARNING

Switch off the power supply before installation

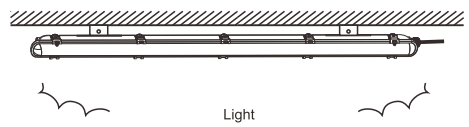

Light

PACKING

N.W.(KG)	G.W.(KG)	CARTON SIZE(mm)	QTN/CTN
17.6	20	1525X290X260	9

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian Energy Upgrades



LM-80 TM 21 LM 79
ISTMT LCP

