



LED Canopy Light B | 100W



Built-in sensor

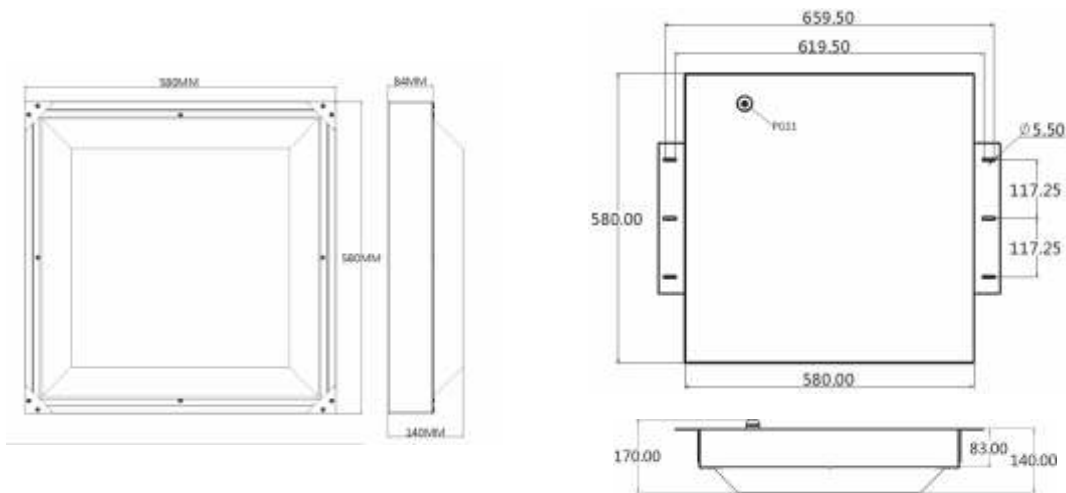

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



LM-80 TM 21 LM 79
ISTMT LCP



Victorian Energy Upgrades



APPLICATION

Suitable for food processing and parking areas, Service station canopies, Car park, Retail areas, Shopping malls and Manufacturing facilities.



SPECIFICATIONS

Item No.	ERS-C100W-B
Product Size (mm)	580X580X180
Input Voltage	AC220-240V,50Hz
Power	100W
LED Type	Lumileds 3030
Input Driver	Sosen / Meanwell
Lumen(± 10%)	13000lm
CCT	2700-6500K
Sensor	Daylight & Microwave Motion Sensor
Beam Angle	120°
CRI	Ra>80
Power Supply Efficiency	>95%
LED Lumious Efficiency	130lm/w
Power Factor (PF)	> 0.95
Total Harmonic Distortion (THD)	≤15%
IP Rating	IP 65
Certificate	C-TICK,SAA,CE,CB
Material	PC+AL
Accessories	2PCS Installation Brackets

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



LM-80 TM 21 LM 79
ISTMT LCP



Victorian
Energy
Upgrades



ESSENTIAL SERVICES COMMISSION

REMOTE CONTROLLER

Factory setting: When turn on the Canopy light, sensor function is closed;
 if you need to open the sensor, please use our remote controller as below.
 Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds),
 standby brightness 0%.

The remote controller interface is a grid of buttons. The top row shows detection range percentages (100%, 75%, 50%, 20%) and buttons for Daylight (D), On (ON), Off (OFF), and Motion (M). The second row shows 'On Lux' settings (5, 25, 50 Lux) and an eye icon for recording current lux. The third row shows 'Lux' settings (100, 300, 600 Lux) and a 'Disable' button. The fourth row shows 'Hold time' settings (2 Sec, 30 Sec, 60 Sec, 2 Min) and 'Min' settings (5, 15, 30, 60 Min). The fifth row shows 'Standby brightness' settings (0%, 20%, 30%, 40%) and 'Lux' settings (50%, 60%, 80%, 100%). The bottom row shows 'Scene' settings (Sc1, Sc2, Sc3) and a refresh icon.

D: Press one time, Daylight Sensor working only.

On: Press one time, work with default setting.

Sc1: Hold on 30 minutes and then dimming down to its 50% luminosity. Daylight Sensor OFF.

Sc2: Hold on 10 minutes and then dimming down to its 20% luminosity. Daylight Sensor OFF.

M: Press one time, Motion Sensor working only.

Record the current environment lux.

Sc3: Hold on 30 seconds and then turn OFF. Daylight Sensor OFF.

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
 Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
 Email: info@erstech.com.au



IPART
 Independent Pricing and Regulatory Tribunal
 New South Wales



LM-80 TM 21 LM 79
 ISTMT LCP



Victorian Energy Upgrades



FUNCTION DEMO-ON/OFF CONTROL



With insufficient daylight, when motion detected, light remains OFF.





With insufficient daylight, when motion detected, light ON.



After the last detection and the present hold time elapsed, light OFF.

SENSOR SPECIFICATION

Detection Patterns

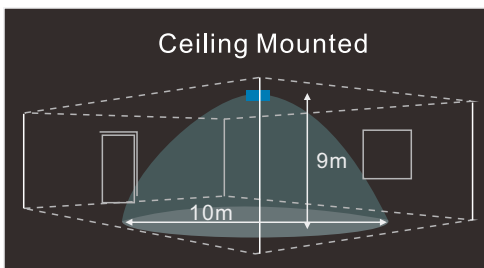

Technical data

Operating voltage	12VDC ± 2v
Stand-by power	< 1W
Operating temperature	-20°C ~ +60°C
Detection area	100%/75%/50%/20%
Hold time	2Sec/30Sec/60Sec/2Min/5Min/15Min/30Min/60Min
Daylight threshold	5Lux/25Lux/50Lux/100Lux/300Lux/600Lux/Disable
Microwave power	< 1mW
Microwave frequency	5.8GHz ± 75MHz
Mounting height	Max.9m(ceiling mounted)
Detection range	Diameter 10m (ceiling mounted)
Type	Built-in

Note: Sensor setting please refer to remote control

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China

Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian
Energy
Upgrades




LM-80 TM 21 LM 79
ISTMT LCP




RECESSED INSTALLATION


1. Fix the bracket kit to the lamp with M5*12 screws.

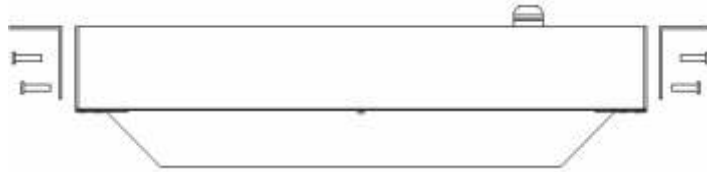

2. Place the lamp into the right place of ceiling like below.

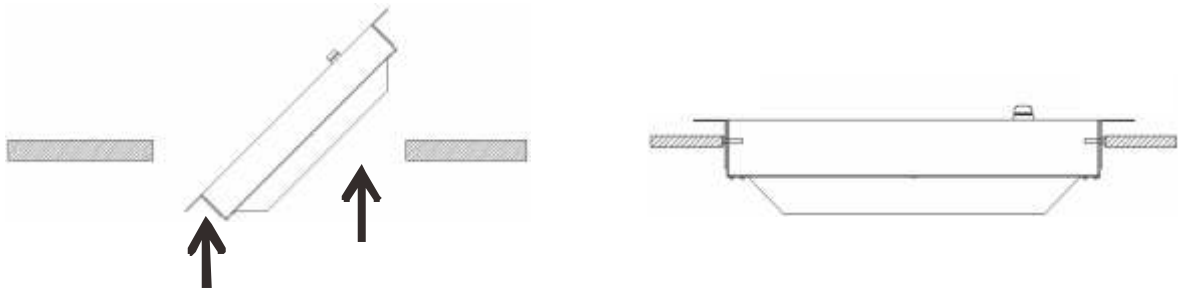

3. The effect is shown like below; then off the power, connect the wires, switch on the power.

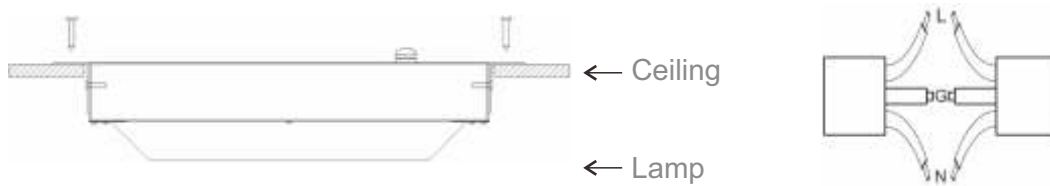

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
 Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
 Email: info@erstech.com.au



IPART
 Independent Pricing and Regulatory Tribunal
 New South Wales



Victorian Energy Upgrades



LM-80 TM 21 LM 79
ISTMT LCP



INSTALLATION INSTRUCTION


Surface Mounted Installation

Accessories Package: 2pcs installation brackets (size 300*52.5*72.5MM, thickness 2.5mm); 6pcs M5*12 screws.

1. Fix the bracket kit to the lamp with M5*12 screws.



2. Fix the lamp to ceiling with M5*12 screws.

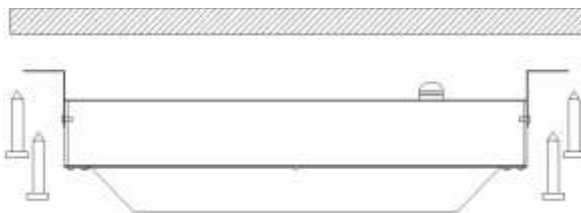

3. The effect is shown like below; then off the power, connect the wires, switch on the power.



Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
 Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
 Email: info@erstech.com.au



LM-80 TM 21 LM 79
 ISTMT LCP



PACKING

Item No.	ERS-C100W-B
Carton Size (mm)	695X690X210
Qty/CTN	1
N.W (KG)	10.3
G.W (KG)	12.3

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second
Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



LM-80 TM 21 LM 79
ISTMT LCP



**Victorian
Energy
Upgrades**



ESSENTIAL SERVICES COMMISSION