

LED Shoe Box Light | 120W



Die-cast Aluminum Housing with Corrosion Resistant Powder Coat

3 Types of Mounting Brackets

High Performance SMD3030 Chips

L70>50,000 hours

Easy to instal with single worker

High Efficiency PC Lens

Type3, Type4 Distribution

Surge Protection 10KVA

High Quality Drivers

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China Warehouse Add: 4–6 Kinder St campbellfield vic3061 Australia

Tel: 048 470 3010

















APPLICATION

- 1. Street Lighting, Road Lighting, Roadway Lighting
- 2. Outdoor Area Lighting, High Mast Lighting
- 3. Parking Lot Lighting, solar Lighting







Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen,China Warehouse Add: 4–6 Kinder St campbellfield vic3061 Australia

Tel: 048 470 3010

















SPECIFICATIONS

Item No.	ERS-S120W	
Power	120W	
Efficiency	200lm/W	
Lumen	24000lm	
Power Driver	ERS-PSB120W	
Driver	ERS driver	
LED Type	Lumileds 3030	
Sensor	Daylight & Microwave motion sensor	
Input Voltage	AC220-240V,50Hz	
ССТ	3000-6500K	
IP Rating	IP 65	
Beam Angle	TYPE3,TYPE4	
Power Factor	>0.9	
CRI	Ra > 70	
Material	AL + PC	
Warranty	5 years	
Product Size (mm)	415X280X70	
Maximun mounting height (m)	12	
Max. torque for mounting screws (N.m)	20	

Shenzhen ERS Technology Factory Add: C209, Baohuasen International Center, Qianjin Second

Road, Xixiang Town, Bao'an District, Shenzhen, China

Warehouse Add: 4–6 Kinder St campbellfield vic3061 Australia

Tel: 048 470 3010

















PACKING





Item No.	ERS-S120/150W
Carton Size (mm)	640X370X135
N.W.(KG)	4
G.W. (KG)	5.5
QTY/CTN	1

BRACKET





Shenzhen ERS Technology Factory Add: C209, Boohugsen International Center, Qianjin Second

Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 4–6 Kinder St campbellfield vic3061 Australia

Tel: 048 470 3010



















DISTRIBUTION OPTIONAL

TYPE 3 TYPE 4

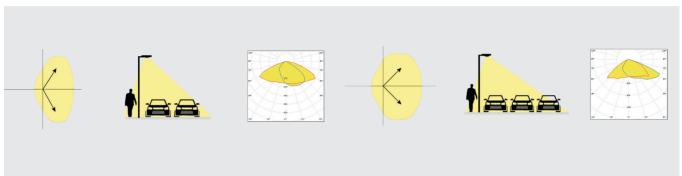

REMOTE CONTROLLER

Factory setting: When turn on the High Bay light, sensor function is closed; if you need to open the sensor, please use our remote controller as below. Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds), standby brightness 0%.

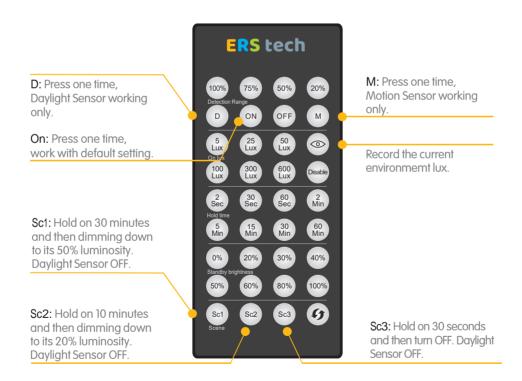

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China Warehouse Add: 4–6 Kinder St campbellfield vic3061 Australia

Tel: 048 470 3010













