

LED Panel Light

Accessories



Factory setting of sensor: When turn on the lamp, sensor function is closed; If you need to open the sensor, please use our remote controller as below.

Show Case:


1.Press “Sensor”--“ON”;

2.Set the data you need.

For instance, you need the lamp holds on 1 min after you leaving the site and then dimming to half brightness, just press the “1 min” in Hold Time section, and press “50%” in stand-by dimming level section.

To open daylight sensor function, press “Sensor” to “ON”, and then press “50 Lux” in Daylight threshold section; Press “Disable” to close it.

To adjust brightness, press the data you want in the “Power” section.

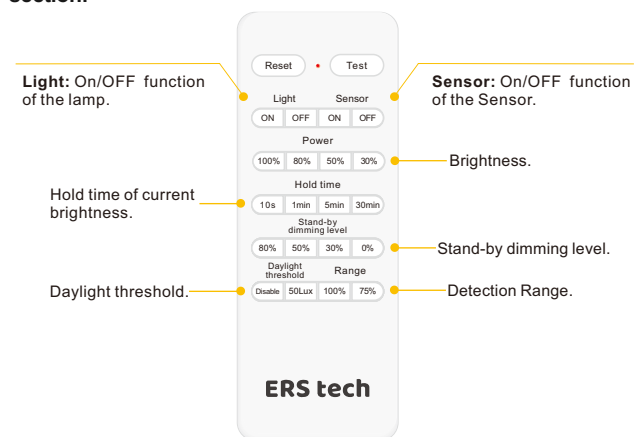


Technical Parameter

Input Voltage	AC220-240V,50Hz	LED Chips	SMD 2835
Beam Angle	120°	Sensor	Daylight & Microwave Motion Sensor
Driver	ERS driver	Power Factor	> 0.9
CCT	3000,4000,5000,6500K	CRI	Ra > 80
Working Temp	-20°C~+50°C	IP Rating	IP20


Installation

WARNING


1.Switch off the power supply before installation.




2.Remove the existing ceiling panel suitable to match the size of the LED panel being installed.





3.Install and connect the LED driver in recessed space.



4.Replace and secure LED panel in the position of removed ceiling panel.



5.Adjust the panel position, then can be powered on.



WARNING

6.Switch on the power supply after installation.

Reminder

- We appreciate your choice!
- Please read the instruction manual before installation and keep it well.

Warning

- To avoid the accident of damage, falling, electric shock or fire, please do not reform the lamp or replace the accessories and confirm with us if you need to change the mounting method.
- Please authorize the installation to qualified installation personnel and obey to the instruction manual. Any unsuitable installation will easily cause the accident of falling, electric shock and fire etc.
- Please cut off the power before installation or any maintenance of the lamp.
- Please cut off the power when it smokes or smells awfully since the accident of fire or electric shock may incur. Ask the qualified personnel for maintenance.
- Please do not dismantle the lamp by yourself since the accident may incur.
- Please don't touch the driver when the lamp works.

Application

The LED panel light is aluminum profiles outside the frame, noble and beautiful perfect for Hotel, school, shopping Mall, supermarket, office, meeting room, hospital, etc.

Troubleshooting&Solutions

Malfunction	Troubleshooting	Solutions
Not working	1.Check whether the power line is properly connected.	1.Reconnect the power wire.
	2.Check whether the power plug is loosen.	2.Re-plug the loosen power plug.
	3.Driving power supply failure.	3.Call the after-sales phone to confirm the problem and replace the normal product.
	4.LED chip breakdown.	4.Call the after-sales phone to confirm the problem and replace the normal product.
	5.Daylight function is turned on.	5.Check the remote control instructions and reset.
LED dim or flashing	1.How to use the remote control to set the brightness.	1.Check the remote control instructions and reset.
	2.The sensing function turned on, and the test function turned on.	2.Check the remote control instructions and reset.
	3.The output of the driver is abnormal.	3.Call the after-sales phone to confirm the problem and replace the normal product.
	4.LED chip breakdown.	4.Call the after-sales phone to confirm the problem and replace the normal product.

Warranty

- Three years warranty.
- During the warranty period, the client shall return the failed parts by courier for inspection and repair. After inspection and repair, the supplier shall send the fixed parts or new parts back. Each party shall bear the freight cost accordingly.
- Keep the warranty card as the warranty certificate.
- The following conditions are not covered by the warranty, and the supplier provides maintenance services by charging maintenance fee:
 - (1) All artificial damages, including damages from operation, usage, storage un conformity with the instruction manual, abnormal working condition etc;
 - (2) Dismantling, maintenance, modification or unqualified repairing for the products without the supplier's authorization;
 - (3) No warranty cards and documents;
 - (4) Damages caused by user's improper delivery or due to force majeure (including fire, flood, thunder hit, earthquake etc).
- All rights reserved.

Warranty Card

Name		Type	
Number		Date	
User		Tel./E-mail	

Date	Issue	Note

Item List

1.Lamp body	— pcs	☐
2.90 degree aluminum reflector	— pcs	☐
3.120 degree aluminum reflector	— pcs	☐
4.Transparent reflector	— pcs	☐
5.Transparent reflector connecting plate and screws	— pcs	☐
6.Aluminum reflector connecting plate,snap ring and screws	— pcs	☐
7.Rubber ring	— pcs	☐
8.The reflector seaing gasket	— pcs	☐
9.Transparent reflector organic glass plate,snap ring	— pcs	☐
10.Accessory Screws	— pcs	☐
11.Instruction Manual (including Warranty Card and Item List)	— pcs	☒
12.Qualification Certificate	— pcs	☒

ERS tech

LED Panel Light Instruction Manual

