
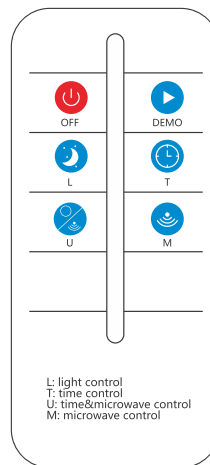


LED Solar Street Light-B | 30W



- No matter day or night, light "OFF"
- No matter day or night, light "NO" for 1 minute
- At night, 12hrs full power
- At night, 4 hrs full power+8hrs 25%
- At night, 4 hrs full power+8hrs motion sensor control
- At night, 12 hrs motion sensor control

Features

1. High class integrated die-casting aluminum alloy case
2. Lighting mode with motion sensor
3. 120° view angle
4. Over 3 nights lighting after full charge
5. Easy to install, auto on/off
6. With remote control, UVA technology, bring high corrosion resistance, 30m control operation, increase/decrease the brightness

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



**Victorian
Energy
Upgrades**



LM-80 TM 21 LM 79
ISTMT LCP




APPLICATION

Highway / Patio Lighting / Building Parking / Bike Path / Courtyard / Garden / Park /
Street / Roadway / Pathway / Parking Lot / Private Road / Sidewalk / Public Square / Plaza .



DIMENSION (Unit:mm)

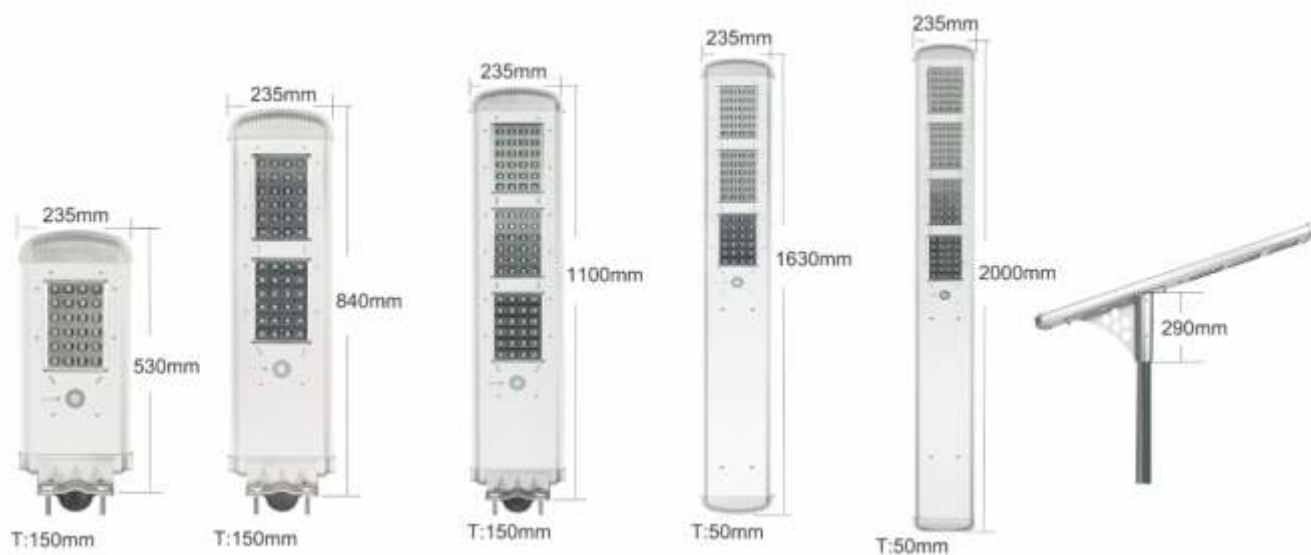

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second
Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



**Victorian
Energy
Upgrades**




**LM-80 TM 21 LM 79
ISTMT LCP**



SPECIFICATIONS

Item No.	ERS-SSB-30W
Lumen	4500lm
Solar Panel	18V 35W
Mounting Height	4~5m
Battery	252WH 12V
Product Size (mm)	1100X235X150
Battery Type	Li-ion
Cloudy/Rainy Days	3Cloudy / Rainy days
Solar Charging Time	6~10 hours by bright sunlight
Motion Sensor	Yes (Microwave Sensor)
Certificates	CE、ROSH
IP Rating	IP 65
Working Temperature	-25℃ to 65℃
Install Pole Diameter	Φ 60-- Φ 65mm
Lighting Mode	Dusk to down + Time controll + motion sensor (Bright lighting 30secs when people move through the light)
Material	High Class Aluminum (Anodic oxidation process)

PHOTOMETRIC DIAGRAMS:

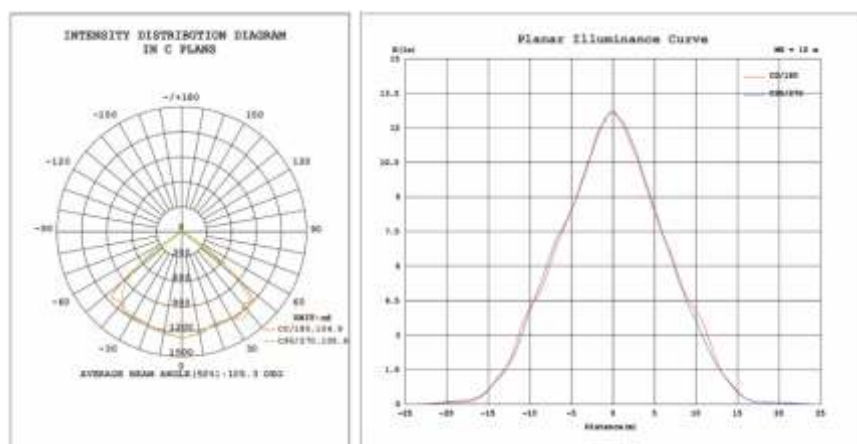

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010
Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian
Energy
Upgrades



LM-80 TM 21 LM 79
ISTMT LCP





PACKING INFORMATION



Model No.	PCS /CTN	OUTER CARTON SIZE (M)			CTN CBM	N.W/CTN	G.W/CTN
		L	W	H			
ERS-SSB-10W	1	0.62	0.20	0.30	0.04	4.2	5.0
ERS-SSB-20W	1	1.92	0.20	0.30	0.06	6.5	7.5
ERS-SSB-30W	1	1.18	0.20	0.30	0.07	8.5	9.7
ERS-SSB-50W	1	1.68	0.14	0.30	0.07	11.0	12.0
ERS-SSB-80W	1	2.05	0.14	0.30	0.09	13.0	14.6

INSTALLTION DIAGRAM

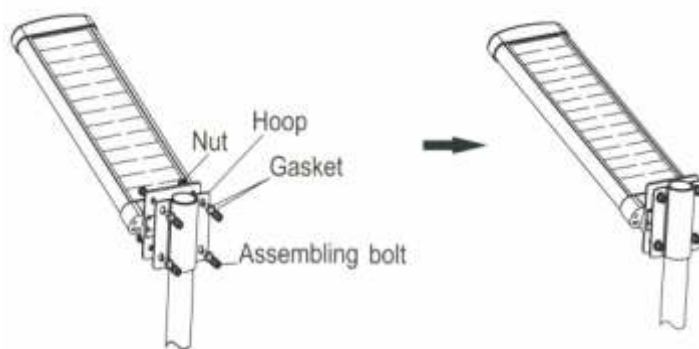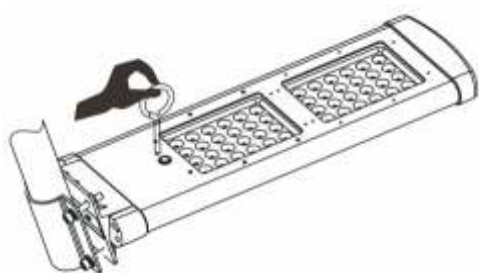

Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



IPART
Independent Pricing and Regulatory Tribunal
New South Wales



Victorian
Energy
Upgrades



LM-80 TM 21 LM 79
ISTMT LCP

