
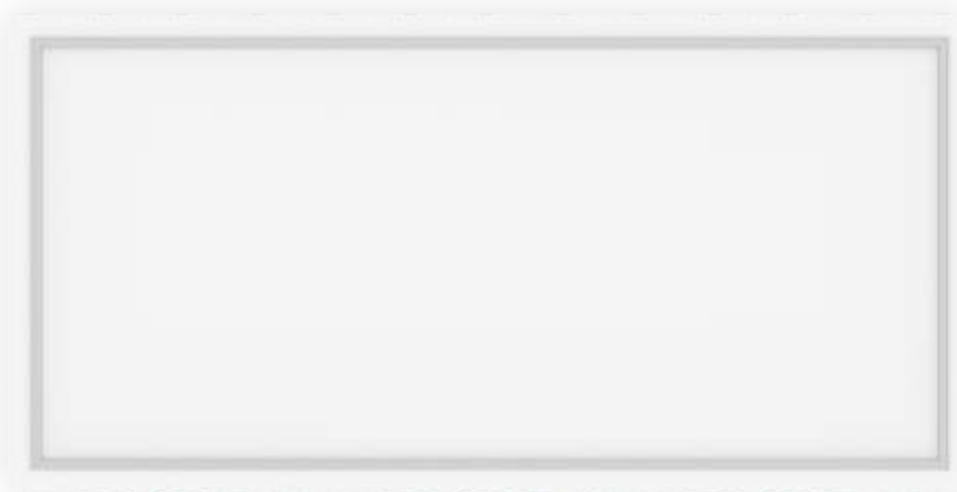


# LED Sensor Panel Light | 12W



Motion+daylight sensor  
Detection area: 2.5-4 metres  
Hold on time: OFF/30s/10min/30min  
With remote control

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010  
Email: [info@erstech.com.au](mailto:info@erstech.com.au)



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**LM-80 TM 21 LM 79**  
**ISTMT LCP**



**Victorian  
Energy  
Upgrades**



**ESSENTIAL SERVICES COMMISSION**

## SPECIFICATIONS

|                   |                                    |
|-------------------|------------------------------------|
| Item No.          | ERS-P12W3060-A1                    |
| Product Size (mm) | 295X595X30                         |
| Power             | 12W                                |
| LCP               | 11.02W                             |
| Input Voltage     | AC220-240V,50Hz                    |
| Efficiency        | 140lm/w                            |
| Lumen             | 1680lm                             |
| Light Type        | Back-lit panel                     |
| Sensor            | Daylight & Microwave Motion Sensor |
| Driver Brand      | ERS Driver (3 Years Warranty)      |
| LED Type          | SMD 2835                           |
| CCT               | 3000K,4000K,5000K,6500K            |
| CRI               | Ra > 80                            |
| Power Factor      | > 0.9                              |
| Beam Angle        | 120°                               |
| IP Rating         | IP 20                              |
| Material          | Aluminum frame+PS diffuser         |
| Warranty          | 3 years                            |
| VEET              | Approved                           |
| IPART             | Approved                           |

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



Victorian  
Energy  
Upgrades



LM-80 TM 21 LM 79  
ISTMT LCP



## DETAILS



Light: ON/OFF function of the lamp

Reset

Test

Sensor: ON/OFF function of the Sensor

Light

Sensor

ON

OFF

ON

OFF

Power

100%

80%

50%

30%

Brightness

Hold time

10s

1min

5min

30min

Hold time of current brightness

Stand-by  
dimming level

80%

50%

30%

0%

Stand-by dimming level

Daylight  
threshold

Disable

50Lux

100%

75%

Daylight threshold

Range

Detection Range

**ERS tech**

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second  
Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au



**IPART**  
Independent Pricing and Regulatory Tribunal  
New South Wales



**Victorian  
Energy  
Upgrades**



**LM-80 TM 21 LM 79**  
**ISTMT LCP**



## APPLICATION



## PACKING

|                  |                 |
|------------------|-----------------|
| Item No.         | ERS-P12W3060-A1 |
| Carton Size (mm) | 625X300X335     |
| Qty/CTN          | 8               |
| N.W (KG)         | 6.5             |
| G.W (KG)         | 8               |

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China  
Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010  
Email: [info@erstech.com.au](mailto:info@erstech.com.au)



IPART  
Independent Pricing and Regulatory Tribunal  
New South Wales



Victorian  
Energy  
Upgrades



LM-80 TM 21 LM 79  
ISTMT LCP

